

Digital clock

Digital clock

Style 5S

Description:

- ▶ Led clock for indoor installation.
- ▶ Hour - minute - second display.
- ▶ Fixed or alternate time with date or week number display or timer display.
- ▶ Height of digit 5 cm, optimal viewing distance : 20 metres.
- ▶ Led colours: red, green, yellow, blue.
- ▶ Models: independent / 24V minute impulse receiver and IRIG-B/AFNOR coded time receiver, wireless DHF, NTP Supervised.



Technical features:

- ▶ Injected ABS case black (IP30, IK07) with diffusing filter.
- ▶ Adjustable brightness (4 levels).
- ▶ Angle of vision 120°.
- ▶ 12 or 24 hour display mode.
- ▶ Automatic summer/winter time changeover and perpetual calendar.
- ▶ Data saving for 7 days.
- ▶ Accuracy of the time quartz base: 0.2 second/day.
- ▶ Silent operation.
- ▶ Programming and time setting through 2 buttons.
- ▶ Digit made of 7 segments with 3 Led each.
- ▶ NTP Synchronization : unicast, multicast and by DHCP.
- ▶ Power supply :
 - Models AFNOR coded time receiver, wireless DHF, independent / 24V minute impulse receiver : 230V \pm 10%, 50/60Hz.
 - Model NTP Supervised : PoE (Power Over Ethernet).
- ▶ Consumption: 55 mA.
- ▶ PoE consumption: 6 W maximum; Class 0 device.
- ▶ Electric protection : class 2.
- ▶ Operating temperature: from -5 to 50°C.
- ▶ Weight: 1.1 Kg.

Norms:

- ▶ Norm NF EN50081-1: generic emission standard.
- ▶ Norm NF EN50082-1: generic immunity standard.
- ▶ Norm NF EN60950: safety of information technology equipment.

Mounting Accessories:

- | | |
|---|---------|
| ▶ Double sided bracket | 936 300 |
| ▶ Single sided bracket | 936 301 |
| ▶ Table holder | 936 303 |
| ▶ Wall plate support for style 5S recessed mounting | 936 309 |
| ▶ Timer control unit for counting up or down | 936 400 |
| ▶ Embedded plate for control unit | 936 405 |

Style 5S references

- | | |
|---|---------|
| ▶ Independent / 24V minute impulse receiver | 936 411 |
| ▶ IRIG-B/AFNOR coded time receiver | 936 421 |
| ▶ Wireless DHF coded time receiver | 936 471 |
| ▶ NTP Supervised | 936 4F1 |

Indicate Led colour by choosing the last number of the reference: red (1), green (2), yellow (3), blue (4).


Led colours



Style 5S with timer control unit



Dimensions in mm

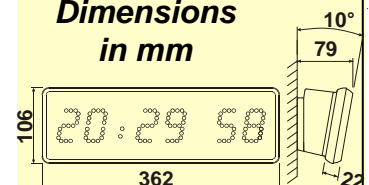

Wall bracket

