
Scoreboard

BT6730 Alpha 14P H15



Indoor multisport scoreboard for sporting venues and indoor arenas

Basketball FIBA levels 1, international level volleyball, international level handball

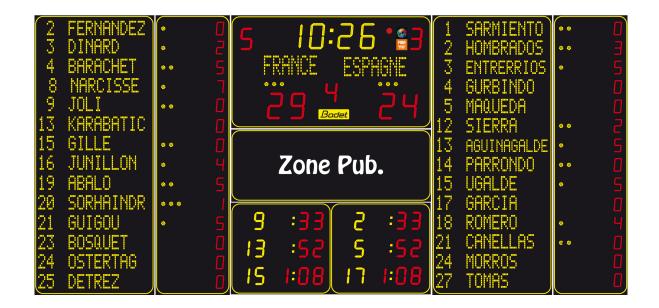

MAIN FEATURES

- 14 players per team scoreboard with 15 cm high names and numbers.
- High luminosity SMD LED technology.
- Luminosity adjusment from the main keyboard at any time during the game.
- Teams' names, players' names and players' numbers can be programmed from a PC connected to the main keyboard through a serial port.
- The PC software manages the teams' names, the players' names and numbers, the scrolling messages and the display luminosity.
- Wired communication.
- Integrated horn (120dB at 1 m)

CERTIFICATIONS AND STANDARD CONFORMITY

- IR&TTE (radio).
- CE marking.
- Electromagnetic compatibility (CEM).
- Low voltage.



BT6730 Alpha 14P H15

DISPLAY

BT6730 Alpha 14P H15 (The displays of all panels are sport dependent)		Number of Digits	Height of Digits	LED Colour
	Game clock, Local time and Rest period timer (or Time-out timer for volley)	4	30 cm	
A	Score (0 to 999)	3 per team	30 cm	
	Teams' names Horizontal scrolling message	Max. 10 characters per team Max. 60 characters	20 cm	
	Period number or Current set number	1	25 cm	
	Number of team fouls or Number of won sets	1 per team	25 cm	
	Time-out indicators	3 dots per team	Ø36 mm	
	Game clock stopped indicator	1 dot	Ø66 mm	
B	Last individual foul (Player's nber + nber of fouls) and	Player nber: 3 x 2 per team	20.000	
	Time-out timer or 1 Penalty timer per team or Previous sets results (up to 4).	Timers 3 x 3: per team	20 cm	
С	Players' numbers (0 to 99 - 14 players per team)	2 per player	15 cm	
	Players' names	Max. 12 characters per name	15 cm	
D	Individual fouls indicators (Basketball only)	4 dots per player	Ø36 mm	
		Fifth foul: 1 dot per player	Ø36 mm	
	Points per player (14 players per team) (Basketball only)	2 per player	15 cm	

TECHNICAL CHARACTERISTICS

	Dimensions L x H x D (mm)	Weight	Construction	Protection Index	Optimal viewing distance	Viewing angle
BT6730 Alpha 14P H15	6830 x 3220 x 80	650 kg	Shockproof steel casing	IP20 IK09	150 m	160°
	Power supp	ly	Power consumption		Electrical protection	
BT6730 Alpha 14P H15	230V 50/60Hz		~4000 W		16 A Circuit breaker	
Main keyboard ⇔BT6730	Wired					

REFERENCES

- BT6730 Alpha 14P H15 scoreboard: ... 915750 (including software).
- Secondary keyboard: 915805.

