

Finish

- Aluminium anodised,
high-gloss aluminium



IP20



500mA CC / 700mA CC



Efficiency luminaire - 88lm/W




DALI



Driver outside




2x20°, 2x30°, 2x40°



Empty space = ≥ 60 mm



Ceiling cut = $\varnothing 74$ mm

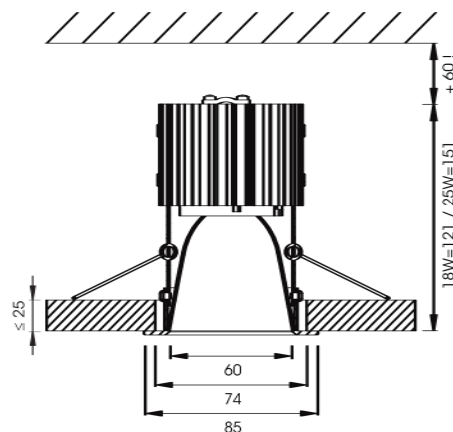

CRI > 80

Not dimmable: on request

LED

18W, 3000K, 2286lm
18W, 4000K, 2390lm
25W, 3000K, 3012lm
25W, 4000K, 3149lm

Driver

18W DALI

500mA / 18W · 207x42x31 mm
N°: LVG 500-020-02-01

25W DALI

700mA / 25W · 207x42x31 mm
N°: LVG 700-030-02-01

Other drivers on request

LED LUMINAIRE

2x20° · 18W · 3000K N°: PUN J085-018 N3-03
2x20° · 18W · 4000K N°: PUN J085-018 N4-03
2x20° · 25W · 3000K N°: PUN J085-025 N3-03
2x20° · 25W · 4000K N°: PUN J085-025 N4-03

2x30° · 18W · 3000K N°: PUN J085-018 M3-03
2x30° · 18W · 4000K N°: PUN J085-018 M4-03
2x30° · 25W · 3000K N°: PUN J085-025 M3-03
2x30° · 25W · 4000K N°: PUN J085-025 M4-03

2x40° · 18W · 3000K N°: PUN J085-018 W3-03
2x40° · 18W · 4000K N°: PUN J085-018 W4-03
2x40° · 25W · 3000K N°: PUN J085-025 W3-03
2x40° · 25W · 4000K N°: PUN J085-025 W4-03