



legg-H9935



legg-H9936

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.

Diffuser - Tempered glass diffuser.

Reflector - Aluminium lamp reflector.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

Objective

Eco friendly surface downlight yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption.

Completely dustproof.

Protected against high pressure water jets.

Obiettivo

Il downlight di superficie eco-compatibile ti garantirà comunque che questo prodotto è durevole e durerà a lungo. Dal momento che questa è una luce a LED, questo sicuramente ti farà risparmiare da un costoso consumo di energia. Si prevede di fornire ottimi risultati con un consumo minimo.


Completamente antipolvere.

Protetto contro i getti d'acqua ad alta pressione.




CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------


legg-H99359	1*9W	65	15°/24°/36°	110 lm/W	90 x 110mm
legg-H993515	1*15W	65	15°/24°/36°	110 lm/W	90 x 180mm
legg-H993620	1*20W	65	15°/24°/36°	110 lm/W	150 x 140mm
legg-H993630	1*30W	65	15°/24°/36°	110 lm/W	150 x 200mm

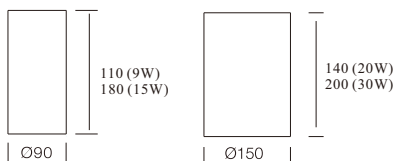

Color Options



CXA 1512/1507 24D
max. 1700cd/klm



- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

