

GREEN ENERGY



**Description**  
**Housing** - Die cast aluminium powder coated with choice of RAL colors.  
**Diffuser** - Tempered glass diffuser.  
**Reflector** - Aluminium reflector.

**Standards** - Manufactured and tested as per PTPS IEC 62722.  
**LED** - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

**Objective**




Eco friendly surface downlight yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption. Protected against the penetration by solid bodies. Protected against sprays of water.

**Obiettivo**

Il downlight di superficie eco-compatibile ti garantirà comunque che questo prodotto è durevole e durerà a lungo. Dal momento che questa è una luce a LED, questo sicuramente ti farà risparmiare da un costoso consumo di energia. Si prevede di fornire ottimi risultati con un consumo minimo. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.

Surface Wall / Ceiling

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
legg-C619120	20W	44	15°/24°/36°	110 lm/W	150 x 165mm
legg-C619130	30W	44	15°/24°/36°	110 lm/W	150 x 165mm
legg-C625130	30W	44	15°/24°/36°	110 lm/W	200 x 200mm
legg-C625142	42W	44	15°/24°/36°	110 lm/W	200 x 200mm
legg-C625158	58W	44	15°/24°/36°	110 lm/W	200 x 300mm

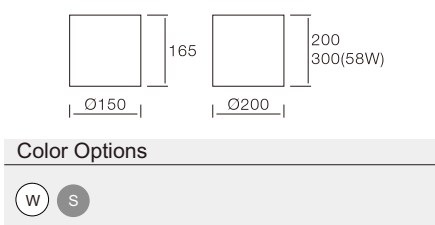

- 2700K
- 3000K
- 4000K
- 5000K

CRI >90    -20° C    85~265V    **Leggero PHILIPS**    LED chip **BRIDGELUX CREE**    **A++**