



legg-SLB25/30J



legg-SLB60/80J



legg-SLB40/50J

**Objective**

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against splash of water.

**Obiettivo**

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.



**Diffuser** - Polycarbonate diffuser.

**Standards** - Manufactured in accordance with IEC 60598.

**LED** - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-SLB25J3	3W	54	110°	110 lm/W	90 x 72mm ☞ 80mm
legg-SLB30J5	5W	54	110°	110 lm/W	105 x 77mm ☞ 90mm
legg-SLB40J9	9W	54	110°	110 lm/W	130 x 62mm ☞ 120mm
legg-SLB50J12	12W	54	110°	110 lm/W	160 x 65mm ☞ 152mm
legg-SLB60J15	15W	54	110°	110 lm/W	185 x 65mm ☞ 165mm
legg-SLB80J21	21W	54	110°	110 lm/W	220 x 80mm ☞ 205mm

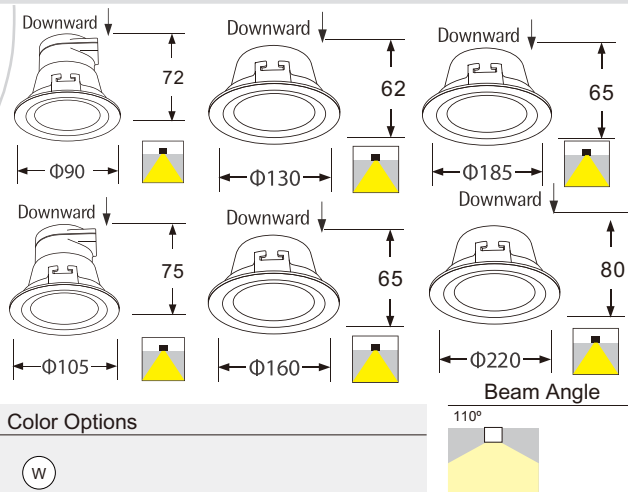

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C  
55° C

85~265V  
50/60Hz

