


GREEN ENERGY



legg-T9144

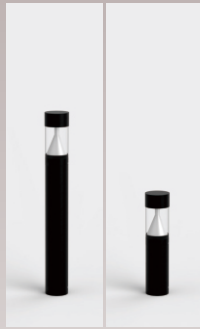

legg-T9148



legg-T9168

Objective

This is very suitable in private gardens, public parks and etc. This light delivers excellent performance and outstanding fitting durability. Also, this have a unique design and will be fitted everywhere in external areas. Completely dustproof. Protected against high pressure water jets.

Obbiettivo

Questo è molto adatto in giardini privati, parchi pubblici ed ecc. Questa luce offre prestazioni eccellenti e una straordinaria durata nel montaggio. Inoltre, questo ha un design unico e verrà montato ovunque nelle aree esterne. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.




Diffuser - Tempered glass diffuser.

Reflector - Aluminium reflector.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	VOLTAGE	DIMENSION
legg-T9144425	4*2.5W	65	220-230V	90 x 380mm
legg-T9148825	8*2.5W	65	220-230V	150 x 380mm
legg-T9168825	8*2.5W	65	220-230V	186 x 520mm
legg-T91681425	14*2.5W	65	220-230V	186 x 950mm

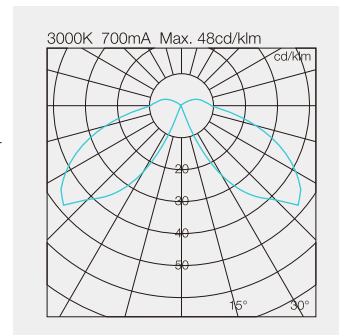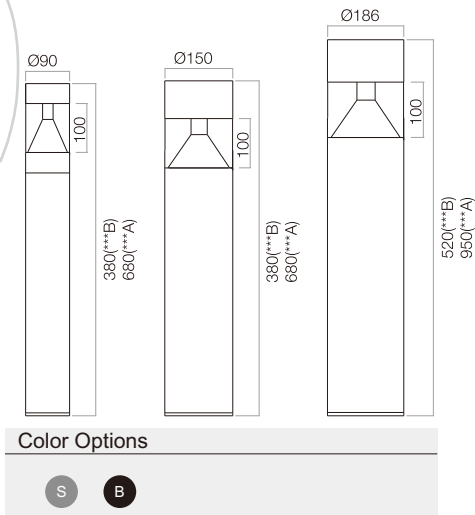

Outdoor



CRI >90

-20° C
55° C

85~265V
50/60Hz

