


GREEN ENERGY



legg-T9241

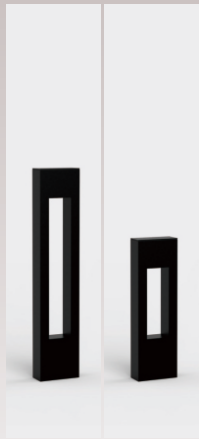

legg-L9886

Objective

This is very suitable in private gardens, public parks and etc. This light delivers excellent performance and outstanding fitting durability. Also, this has a unique design and will be fitted everywhere in external areas. Completely dustproof. Protected against high pressure water jets.

Obiettivo

Questo è molto adatto in giardini privati, parchi pubblici ed ecc. Questa luce offre prestazioni eccellenti e una straordinaria durata nel montaggio. Inoltre, questo ha un design unico e verrà montato ovunque nelle aree esterne. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.



Diffuser - Tempered glass diffuser.

Reflector - Optical Lens.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	VOLTAGE	DIMENSION
legg-T924115	1*15W	65	220-230V	100 x 80 x 600mm
legg-L988645	1*45w	65	220-230V	250 x 100 x 2500mm

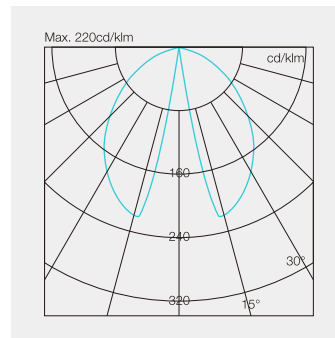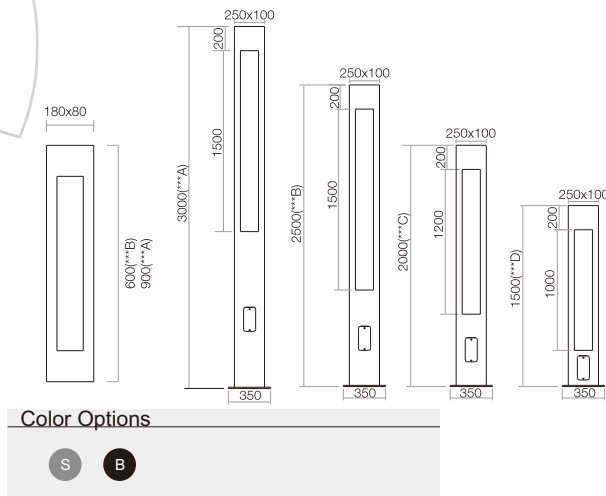

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

