



legg-JD8575L



legg-JD8575LR

Objective

Light designed to direct a narrow intense beam of light at different distances in small area. Illuminating them properly by establishing the focal ratios best suited to each situation. Usually used in Living, Hallway, Bathroom and Etc. Completely dustproof. Protected against splash of water.




Description

Housing - Die cast aluminium powder coated with choice of RAL colors.
Diffuser - Tempered glass diffuser.
Reflector - Aluminium reflector.

Standards - Manufactured in accordance with IEC 60598.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	BEAM ANGEL	LUMENS	DIMENSION
legg-JD8575L7	7W	54	15°/24°/45°/60°	110 lm/W	95 x 113mm Φ85mm
legg-JD8575L9	9W	54	15°/24°/45°/60°	110 lm/W	95 x 113mm Φ85mm
legg-JD8575LR7	7W	54	15°/24°/45°/60°	110 lm/W	95 x 113mm 83 x 83mm
legg-JD8575LR9	9W	54	15°/24°/45°/60°	110 lm/W	95 x 113mm 83 x 83mm

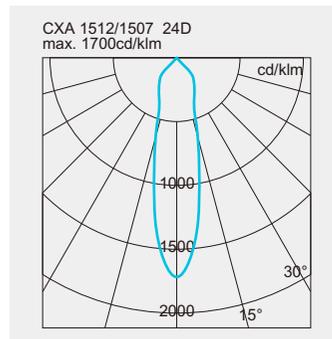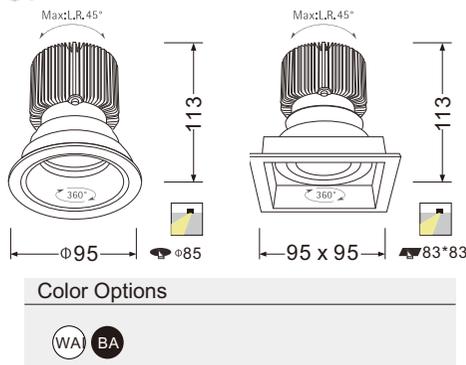

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

Leggero
PHILIPS

LED CHIPS
BRIDGELUX.
CREE

