


GREEN ENERGY



legg-A04817

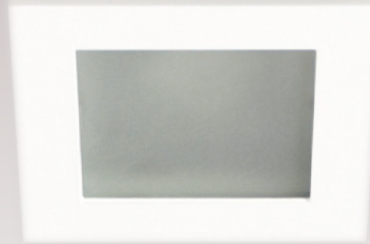

legg-A04917

Objective

Light designed to direct a narrow intense beam of light at different distances in small area. Illuminating them properly by establishing the focal ratios best suited to each situation. Usually used in Living, Hallway, Bathroom and Etc. Completely dustproof. Protected against splash of water.

Obiettivo

Luce progettata per dirigere uno stretto intenso fascio di luce a diverse distanze in piccola area. Illuminandoli correttamente stabilendo i rapporti focali migliori adatto a ogni situazione. Solitamente usato in soggiorno, corridoio, bagno ed ecc. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.

Diffuser - Frosted glass / Lamp Diffuser.



Reflector - LED lamp reflector.

Standards - Manufactured in accordance with IEC 60598.



LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE POWER IP BEAM ANGLE LUMENS DIMENSION

legg-A04817	7W	54	15°/24°/45°/60°	110 lm/W	90 x 90 x 125mm 80x80mm
legg-A04917	7W	54	15°/24°/45°/60°	110 lm/W	90 x 90 x 125mm 75x75mm



Color Options



- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

