



legg-CR0954

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.

Diffuser - Tempered glass diffuser.

Reflector - Anodized aluminium reflector.

Standards - Manufactured in accordance with IEC 60598.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

Objective




Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against high pressure water jets.

Obiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-CR0954	9W	54-65	35°	110 lm/W	92 x 62mm Ø82mm
legg-CR1654	16W	54-65	30°	110 lm/W	136 x 75mm Ø120mm
legg-CR2454	24W	54-65	15°/30°	110 lm/W	175 x 100mm Ø155mm
legg-CR3254	32W	54-65	30°	110 lm/W	196 x 105mm Ø172mm
legg-CR4554	45W	54-65	25°	110 lm/W	230 x 125mm Ø210mm

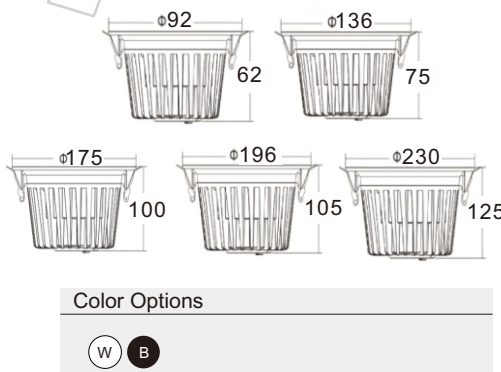

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

Leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

