

GREEN ENERGY



legg-CSO0954

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.

**Diffuser** - PMMA polycarbonate diffuser.

**Standards** - Manufactured in accordance with IEC 60598.

**LED** - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

**Objective**

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against high pressure water jets.

**Obiettivo**



Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-CSO0954	9W	54-65	85°	110 lm/W	136 x 136 x 55mm  Φ120mm
legg-CSO1654	16W	54-65	85°	110 lm/W	175 x 175 x 70mm  Φ155mm
legg-CSO2454	24W	54-65	85°	110 lm/W	196 x 196 x 70mm  Φ172mm
legg-CSO3254	32W	54-65	85°	110 lm/W	230 x 230 x 70mm  Φ210mm



Color Options

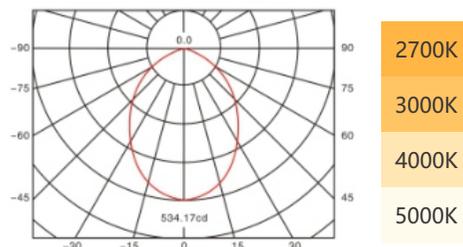

CRI >90

-20° C  
55° C

85~265V  
50/60Hz

