

GREEN ENERGY



legg-8668B10

legg-10090B20

legg-120B30

legg-120B45

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.

**Diffuser** - Tempered glass diffuser.

**Reflector** - Aluminium reflector.

**Standards** - Manufactured in accordance with IEC 60598.

**LED** - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

**Objective**

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience.

Completely dustproof.

Protected against splash of water.

**Obiettivo**

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere.




Protetto contro i getti d'acqua ad alta pressione.

Completamente antipolvere.

Protetto contro gli spruzzi d'acqua.

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-8668B10	10W	54	15°/24°/40°	110 lm/W	86 x 86mm Φ75mm
legg-10090B20	20W	54	15°/24°/38°/60°	110 lm/W	100 x 87mm Φ90mm
legg-120B30	30W	54	15°/24°	110 lm/W	130 x 140mm Φ125mm
legg-120B45	45W	54	15°/24°	110 lm/W	130 x 140mm Φ125mm

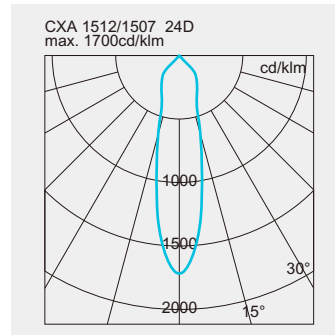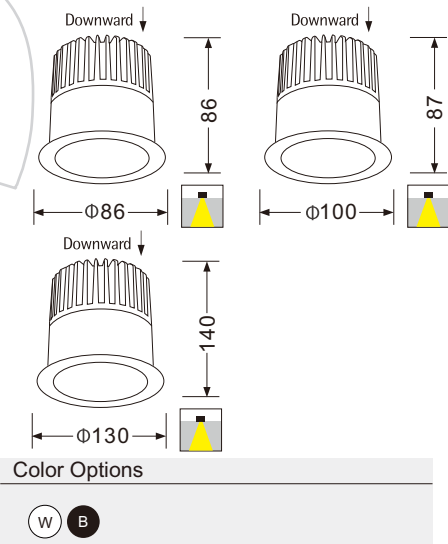

- 2700K
- 3000K
- 4000K
- 5000K



CRI > 90

-20° C  
55° C

85~265V  
50/60Hz

