



Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against splash of water.

Obiettivo



Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo dello spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.
Diffuser - Tempered glass diffuser.
Reflector - Aluminium reflector.

Standards - Manufactured in accordance with IEC 60598.
LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
legg-9582B10	10W	54	15°/24°/40°	110 lm/W	95 x 96mm Φ85mm
legg-JD150B30	30W	54	15°/24°	110 lm/W	160 x 130mm Φ150mm
legg-JD150B45	45W	54	15°/24°	110 lm/W	160 x 130mm Φ150mm

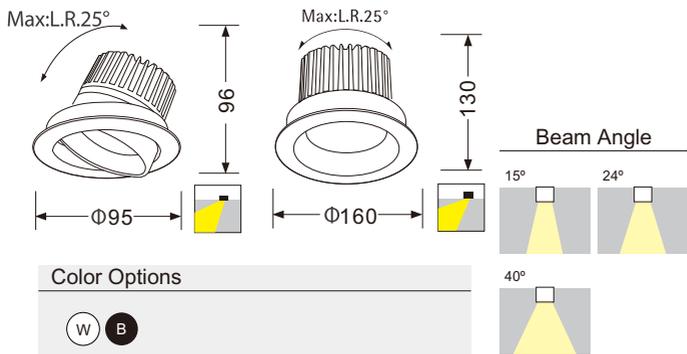

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

