



Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against splash of water.

Obiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.


Description

Housing - Die cast aluminium powder coated with choice of RAL colors.
Diffuser - Tempered glass diffuser.
Reflector - Aluminium reflector.



Standards - Manufactured in accordance with IEC 60598.
LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-JD9582A10	10W	54	15°/24°/38°/60°	110 lm/W	95 x 82mm Φ 85mm
legg-JD118108A20	20W	54	15°/24°/38°/60°	110 lm/W	118 x 85mm Φ 108mm
legg-JD140A30	30W	54	15°/24°	110 lm/W	150 x 95mm Φ 140mm
legg-JD140A45	45W	54	15°/24°	110 lm/W	150 x 95mm Φ 140mm

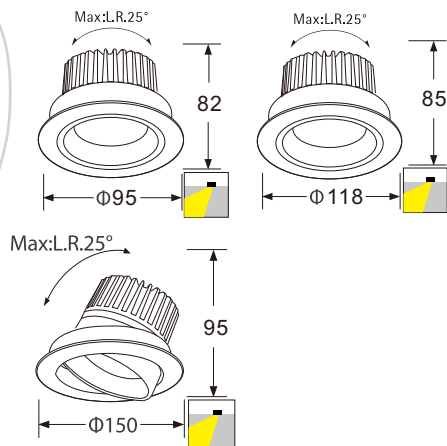

Color Options

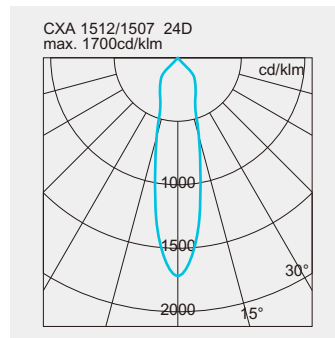

- 2700K
- 3000K
- 4000K
- 5000K



CRI >90

-20° C
55° C

85~265V
50/60Hz

