



Description

Housing - Die cast aluminium with PVC coated with choice of RAL colors.

Diffuser - Tempered glass diffuser.

Reflector - Aluminium reflector.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).



Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against splash of water.

Obiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
legg-10090DA10	10W	54	15°/24°/38°/60°	110 lm/W	100 x 70mm ☞ 90mm
legg-129120DA20	20W	54	15°/24°/38°/60°	110 lm/W	129 x 75mm ☞ 120mm
legg-118108CR20	20W	54	15°/24°/38°/60°	110 lm/W	128 x 128 x 75mm ☞ 115 x 115mm

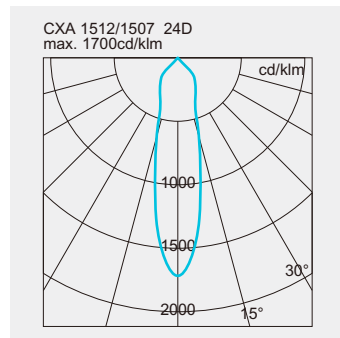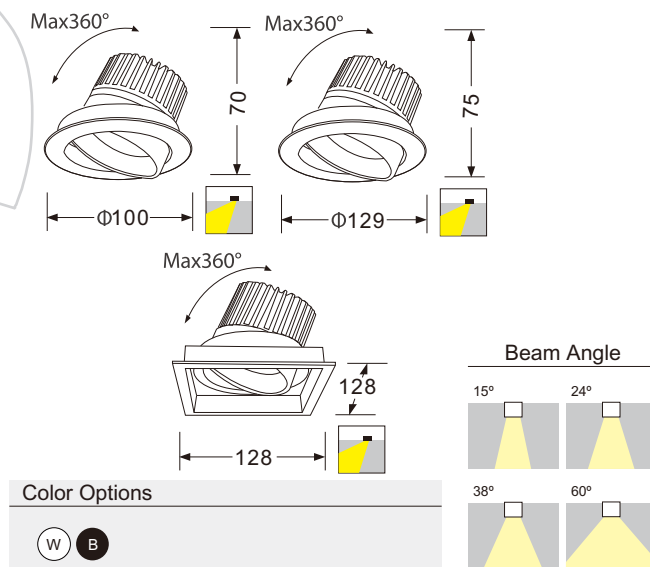

- 2700K
- 3000K
- 4000K
- 5000K