


# Selection Guide

# Sivoia QS Triathlon

Residence: \_\_\_\_\_ Room: \_\_\_\_\_ Window(s): \_\_\_\_\_

## Step 1 Select Shade Style

### Honeycomb



### Roller

- Headrail without fascia**  
(battery-powered, regular roll shown)




- Regular Roll**  
fabric closest to the glass  
(standard)

- Reverse Roll**  
fabric farthest from the glass  
(recommended to clear door or  
window hardware)

### With fascia

- Fabric-Wrapped**



- Architectural**



- Regular Roll**  
fabric closest to the glass  
(reverse roll not available  
with fascia)

## Step 2 Select Power

- Battery-powered**

- Plug-in**

- Power Panel**

- Manual shade**

## Step 3 Select Control

### System

- Keypad**

- Timeclock**

- Mobile device**

- Pico**

- Third-party integration**

### Standalone

- Pico**  
for controlling a single  
shade or multiple shades  
with one button press.

- 4-group RF**  
for assigning a group of shades  
to each of the four group buttons  
on the remote.


**Please note:** Product options may vary depending on application and intended use. For more technical information, reference [www.lutron.com](http://www.lutron.com) or work with your qualified Lutron provider. Product availability is subject to change.

## Step 4

## Shade Mount and Measurements (choose one)

- Inside Mount** enter window measurements below;  
if full recess is desired, check the projection dimension of your shade type

**Width:**




A \_\_\_\_\_ inches/mm

B \_\_\_\_\_ inches/mm

C \_\_\_\_\_ inches/mm

Smallest width: \_\_\_\_\_ inches/mm

**Height:**



D \_\_\_\_\_ inches/mm

E \_\_\_\_\_ inches/mm


F \_\_\_\_\_ inches/mm

Smallest width: \_\_\_\_\_ inches/mm

**Honeycomb shade projection** full-recess depth for inside mount


**Battery powered**  
Tap 'n' Tilt brackets

2½ in  
(64 mm)



**Manual shade**  
Stationary brackets


2 in  
(51 mm)



**Roller shade projection** full-recess depth for inside mount


**Without Fascia\***  
(battery powered)

3 in  
(76 mm)




(wired power)

3 in  
(76 mm)




(cordless manual)

3 in  
(76 mm)




**Fabric-Wrapped Fascia**

3⅜ in  
(86 mm)



**Architectural Fascia**

3⅜ in  
(86 mm)



\* Without fascia, the projection varies with the size of the fabric roll-up (fabric panel height). The dimension shown is based on the largest available fabric panel height; the **maximum** projection.

- Outside Mount** enter width and height below

**On Trim**       **Above Trim\*\*** (includes spacers to clear trim up to 1/2" (13 mm) thick)

**Width:** Enter the width of the area you want the fabric to cover \_\_\_\_\_ inches/mm

**Height:** Enter the distance from the top of the headrail to the window sill \_\_\_\_\_ inches/mm

\*\* When mounting above trim, the top of the headrail must be at least 3⅝" (80 mm) (honeycomb), or 4½" (114 mm) (roller) above the top edge of the window trim.

## Step 5

## Select Fabric

Utilize the insulating Honeycomb or Roller Essentials fabric binder or visit [www.lutron.com/fabrics](http://www.lutron.com/fabrics)

Fabric P/N: \_\_\_\_\_


For more information, please download the Lutron Fabric Collections mobile app.

## Step 6

## Honeycomb Shade Enhancements

### Back Cover

A cover on the back of the headrail eliminates any light that may come through the mounting area (typically used only on room darkening, inside mount applications).

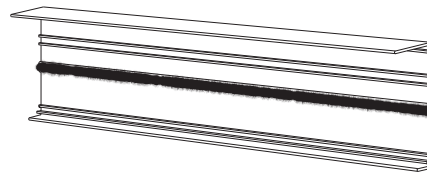


### Cable-Guided

(outside mount only)

Select this if you are mounting a shade to a door.

Choose anchor and matching hardware color:

-  Snow      Biscuit      Sienna

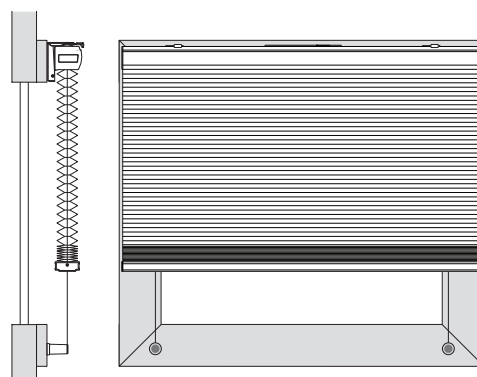

For more information, please visit [www.lutron.com](http://www.lutron.com) or call **1 (800) 446-1503**

[www.lutron.com](http://www.lutron.com)



World Headquarters 1.610.282.3800

24/7 Technical Support 1.800.523.9466

Customer Service 1.888.LUTRON1 (1.888.588.7661)

