



Fused Connection Units



Range of Simply Stylish Wiring Accessories

Designed to provide a competitive, cost effective equivalent range of white moulded accessories with a sleek, slim design creating a modern aesthetic.

Manufactured from Polycarbonate with reinforced interior plates to ensure every product is robust, strong, durable and UV stabilised so that signs of ageing is not a problem.

Fused Connection Units

Product Range

Fused Connection Units (With Optional Flex Outlet Through Front)

CPC050	13A Fused Connection Unit
CPC051	13A DP Switched Fused Connection Unit
CPC052	13A DP Switched Fused Connection Unit with Neon
CPC053	13A Fused Connection Unit with Neon



CPC050



CPC053



CPC051



CPC052

Fused Connection Units

Product Range

Fused Connection Units (Without Flex Outlet)

CPC650	13A Fused Connection Unit
CPC651	13A DP Switched Fused Connection Unit
CPC652	13A DP Switched Fused Connection Unit with Neon
CPC653	13A Fused Connection Unit with Neon



CPC650



CPC653




CPC651



CPC652

Fused Connection Units


Product Dimensional Drawings (mm)

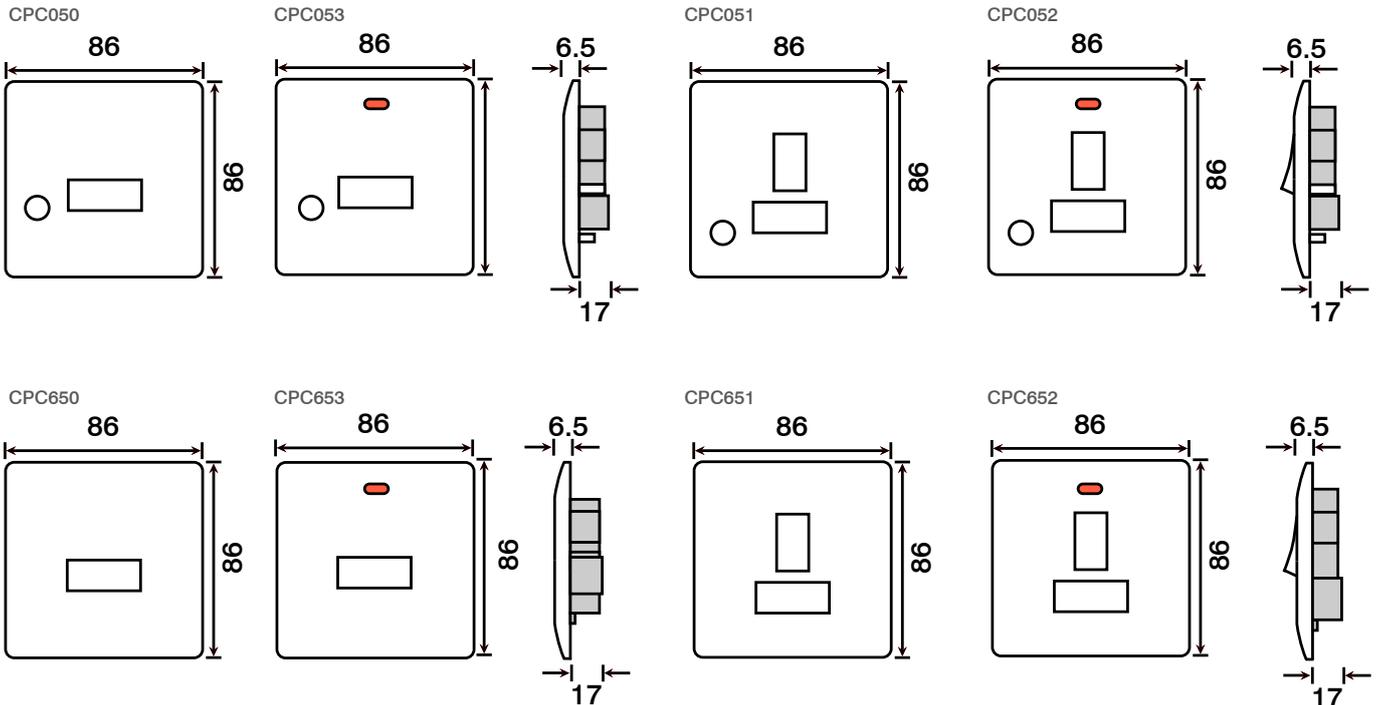


Fused Connection Units

Product Wiring Diagram


CPC650 & CPC653

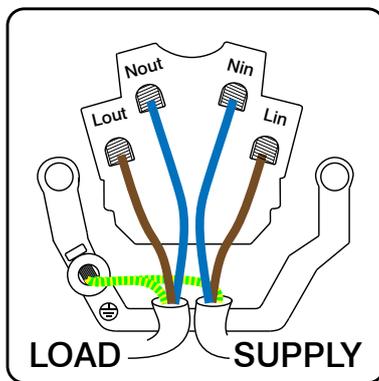


CPC651 & CPC652

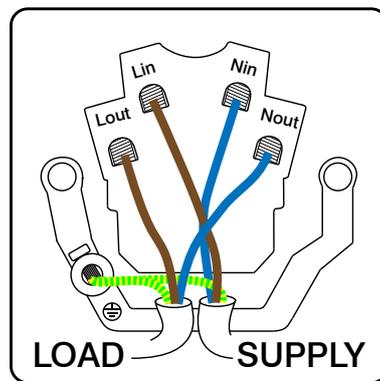

CPC050 & CPC053

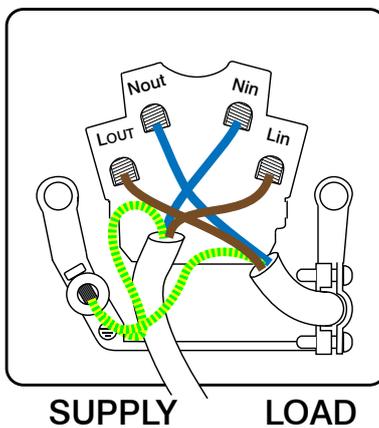

CPC051 & CPC052

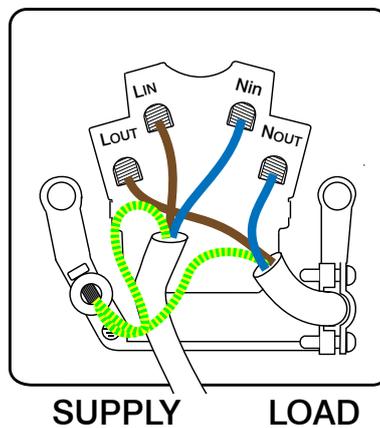

Fused Connection Units

Technical Specification

Fused Connection Units

Material Composition	Front Plate, Switch, Fuse Drawer & Neon Lens: Polycarbonate
	Insert & Base: Polycarbonate
	Terminals: Brass Plated Steel
	Terminal Screws: Steel & Yellow Passivated
	Internal Mechanism: Formed Press Brass
	Silver "On-lay" Copper / Brass Contacts
Voltage	250V~ 50Hz
Current Rating	13A
Fuse Fitted	13A (BS 1362)
Terminal Screw Size	4mm \varnothing
Torque Value	1.2Nm
Cable Size	4 x 2.5mm ² , 2 x 4.0mm ²
Double Pole	051, 052, 651, 652
Fixing Centres	60.3mm
Back Box Depth	35mm
Warranty	10 Years
Operational Temperature	-5° to +40°C
Standards	BS 1363-2: 2016
	BS 1362: 1973 (Fuse)

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



EU DECLARATION OF CONFORMITY

1. *Issuer Name* Scolmore International Limited
2. *Issuer Address* 1 Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XB
3. *Object(s) of Declaration* Seera Range
 - a. *Group* Fused Connection Units
 - b. *Model No.* CPC050, CPC051, CPC052, CPC053, CPC650, CPC651,
CPC652 & CPC653
4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*
5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

BS 1363-2: 2016

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2015.

This declaration has been issued under the sole responsibility of the manufacturer, signed at, for and on behalf of: Scolmore International Limited

A handwritten signature in blue ink, appearing to read "Karl Rawlins".

Karl Rawlins – Senior Technical Support Engineer