Myriad V Residential LED - Housing only MYRDHS ST 3K DALIEM SIL 2057964



Product features

The Myriad Housing 3000K Spot accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1119lm, luminaire efficacy 93lm/W. Colour rendering index Ra>80, Colour temperature 3000K, Beam angle 28ø, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions:













PRODUCT OVERVIEW

| Product name MYRDHS ST 3K DALIEM SIL Technology LED Housing Aluminium | |
|---|---------|
| | |
| Housing Aluminium | |
| 7.000.00 | |
| Mount Ceiling recessed | |
| Environment Integral | |
| General application Museums & Galleries, Office, Retail, Residential & Co | onsumer |
| Certifications EUNEW008 | |
| ETIM Class EC001744 | |
| Fixture luminous flux (lm) 1119 | |
| Luminaire efficacy (Im/W) 93 | |
| LOR (%) 100 | |
| Colour temperature (K) 3000 | |
| CRI (Ra) 85 | |
| Beam Angle (°) 28 | |
| Luminous flux (emergency) (lm) 347 | |
| Total power consumption (W) 12 | |
| Electrical protection Class II | |
| Control gear type Electronic | |
| Minimum dimming level (%) | |
| Average life (Nominal) (h) 50000 | |
| Housing colour Silver Trim | |
| IP rating IP20 | |
| IK rating IK02 | |
| Product EAN number 5025768579648 | |
| Lamps Yes | |
| Included lamp INTEGRATED LED | |

DATA TABLE

| General of | lata |
|------------|------|
|------------|------|

| IPC Code | 2057964 |
|--------------|-------------------------|
| Product name | MYRDHS ST 3K DALIEM SIL |



Myriad V Residential LED - Housing only MYRDHS ST 3K DALIEM SIL 2057964


| To the store. | 150 |
|---------------------------------------|---|
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Museums & Galleries, Office, Retail, Residential & Consumer |
| Operating temperature rated (°C) | 25 |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Optical data | |
| Fixture luminous flux (lm) | 1119 |
| Luminaire efficacy (Im/W) | 93 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 28 |
| Distribution type | Direct |
| Luminous flux (emergency) (lm) | 347 |
| Emergency duration (h) | 3 |
| Emergency duration (ii) | 3 |
| Electrical data | |
| Total power consumption (W) | 12 |
| Mains voltage (V) | 230-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 250 |
| Nominal Frequency (Hz) | 50/60Hz |
| Lifetime data | |
| Average life (Nominal) (h) | 50000 |
| , word go me (womman) (n) | 00000 |
| Physical data | |
| Housing colour | Silver Trim |
| IP rating | IP20 |
| IK rating | IK02 |
| Diffuser finish | Silver Trim |
| Reflector finish | Aluminium |
| Nominal Product Height (mm) | 72 |
| Weight (kg) | 1.39 |
| Recessed Depth (mm) | 72 |
| Packaging | |
| <u> </u> | Onder |
| Single packaging type | Carton |
| Product EAN number | 5025768579648 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| | |



Myriad V Residential LED - Housing only MYRDHS ST 3K DALIEM SIL 2057964

| DUN14 (outer) | 05025768579648 |
|--------------------------------------|----------------|
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |

PHOTOMETRY

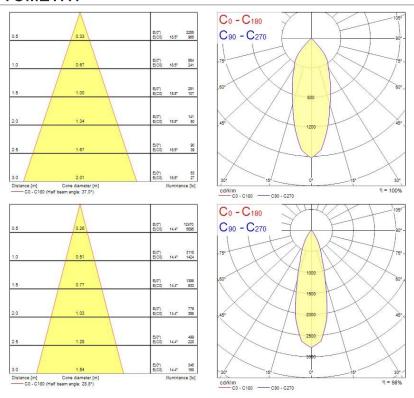

TECHNICAL DRAWINGS



Myriad V Residential LED - Housing only MYRDHS ST 3K DALIEM SIL 2057964

