

Myriad V Residential LED - Housing only

MYRDHS FL 2.7K PHDM SIL
2057969



Product features

- The Myriad Housing 2700K Flood accent downlight is a high efficient 10W recessed spotlight, luminous flux: 1167lm, luminaire efficacy 117lm/W. Colour rendering index Ra>80, Colour temperature 3000K, Beam angle 46°, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



PRODUCT OVERVIEW

| | |
|-----------------------------|---|
| IPC Code | 2057969 |
| Product name | MYRDHS FL 2.7K PHDM SIL |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Museums & Galleries, Office, Retail, Residential & Consumer |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1167 |
| Luminaire efficacy (lm/W) | 117 |
| LOR (%) | 100 |
| Colour temperature (K) | 2700 |
| CRI (Ra) | 85 |
| Beam Angle (°) | 46 |
| Total power consumption (W) | 10 |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 10 |
| Average life (Nominal) (h) | 50000 |
| Housing colour | Silver Trim |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768579693 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|--------------|-------------------------|
| IPC Code | 2057969 |
| Product name | MYRDHS FL 2.7K PHDM SIL |
| Technology | LED |
| Housing | Aluminium |

Myriad V Residential LED - Housing only

MYRDHS FL 2.7K PHDM SIL
2057969

| | |
|---|---|
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Museums & Galleries, Office, Retail, Residential & Consumer |
| Operating temperature rated (°C) | 25 |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |

Optical data

| | |
|-----------------------------------|--------|
| Fixture luminous flux (lm) | 1167 |
| Luminaire efficacy (lm/W) | 117 |
| LOR (%) | 100 |
| Colour temperature (K) | 2700 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 46 |
| Distribution type | Direct |

Electrical data

| | |
|------------------------------------|------------|
| Total power consumption (W) | 10 |
| Mains voltage (V) | 230-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 10 |
| Drive current (mA) | 250 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------------|-------|
| Average life (Nominal) (h) | 50000 |
|-----------------------------------|-------|

Physical data

| | |
|------------------------------------|-------------|
| Housing colour | Silver Trim |
| IP rating | IP20 |
| IK rating | IK02 |
| Diffuser finish | Silver Trim |
| Reflector finish | Aluminium |
| Nominal Product Height (mm) | 72 |
| Weight (kg) | 0.39 |
| Recessed Depth (mm) | 72 |

Packaging



| | |
|--|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768579693 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| DUN14 (outer) | 05025768579693 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |

Myriad V Residential LED - Housing only MYRDHS FL 2.7K PHDM SIL 2057969


Packaging outer depth (cm)

17.5

PHOTOMETRY

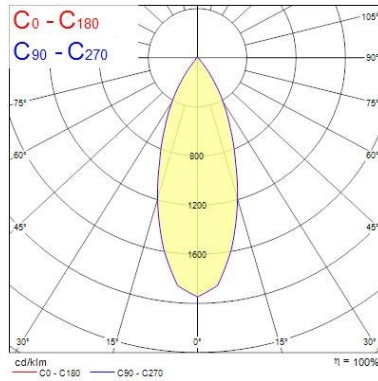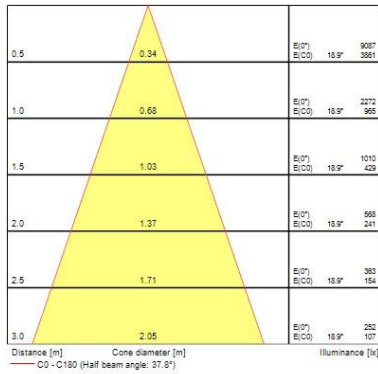



TECHNICAL DRAWINGS




Myriad V Residential LED - Housing only MYRDHS FL 2.7K PHDM SIL 2057969


Concord 2057969


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2057969  874/2012