


Myriad V Residential LED - Housing only

MYRDHS FL 4K PHDMEM SIL
2057979



Product features

- The Myriad Housing 4000K Flood accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1023lm, luminaire efficacy 85lm/W. Colour rendering index Ra>80, Colour temperature 4000K, Beam angle 46°, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



PRODUCT OVERVIEW

IPC Code	2057979
Product name	MYRDHS FL 4K PHDMEM SIL
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1023
Luminaire efficacy (lm/W)	85
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Beam Angle (°)	46
Luminous flux (emergency) (lm)	352
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP20
IK rating	IK02
Product EAN number	5025768579792
Luminous flux (emergency) (lm)	352
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2057979
----------	---------

Myriad V Residential LED - Housing only

MYRDHS FL 4K PHDMEM SIL
2057979

Product name	MYRDHS FL 4K PHDMEM SIL
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1023
Luminaire efficacy (lm/W)	85
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Luminous flux (emergency) (lm)	352
Emergency duration (h)	3

Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

Physical data

Housing colour	Silver Trim
IP rating	IP20
IK rating	IK02
Diffuser finish	Silver Trim
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Weight (kg)	1.39
Recessed Depth (mm)	72

Packaging





Single packaging type	Carton
Product EAN number	5025768579792
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0

Myriad V Residential LED - Housing only


MYRDHS FL 4K PHDMEM SIL
2057979

Packaging single depth (cm)	17.5
DUN14 (outer)	05025768579792
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

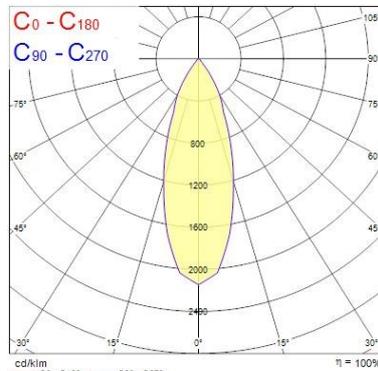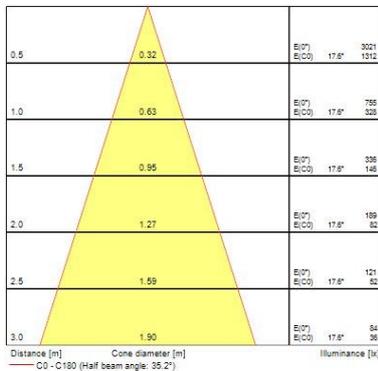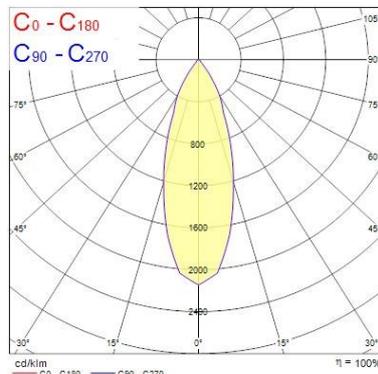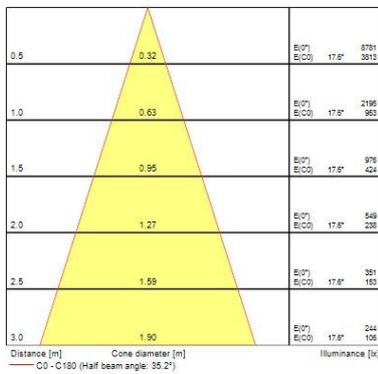

TECHNICAL DRAWINGS



Myriad V Residential LED - Housing only MYRDHS FL 4K PHDMEM SIL 2057979

Concord 2057979

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2057979  874/2012