Concord

Myriad V Residential LED - Housing only MYRDHS ST 2.7K PHDMEM WHT 2057983



Product features

The Myriad Housing 2700K Spot accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1286lm, luminaire efficacy 107lm/W. Colour rendering index Ra>80, Colour temperature 2700K, Beam angle 28ø, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



PRODUCT OVERVIEW

IPC Code	2057983
Product name	MYRDHS ST 2.7K PHDMEM WHT
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (Im)	1286
Luminaire efficacy (Im/W)	107
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	85
Beam Angle (°)	28
Luminous flux (emergency) (Im)	275
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	White Trim
IP rating	IP20
IK rating	IK02
Product EAN number	5025768579839
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data	
IPC Code	2057983
Product name	MYRDHS ST 2.7K PHDMEM WHT

Concord


Myriad V Residential LED - Housing only MYRDHS ST 2.7K PHDMEM WHT 2057983

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744
Optical data	
Fixture luminous flux (Im)	1286
Luminaire efficacy (Im/W)	107
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct
Luminous flux (emergency) (Im)	275
Emergency duration (h)	3
Electrical data	
Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
	250
Drive current (mA)	50/60Hz
Nominal Frequency (Hz)	50/00FIZ
Lifetime data	
Average life (Nominal) (h)	50000
Physical data	
Housing colour	White Trim
IP rating	IP20
IK rating	IK02
Diffuser finish	White Trim
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Weight (kg)	1.39
Recessed Depth (mm)	72
Packaging	
Single packaging type	Carton
Product EAN number	5025768579839
	17.5
Packaging single length / height (cm)	
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5

Myriad V Residential LED - Housing only MYRDHS ST 2.7K PHDMEM WHT 2057983


DUN14 (outer)	05025768579839
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

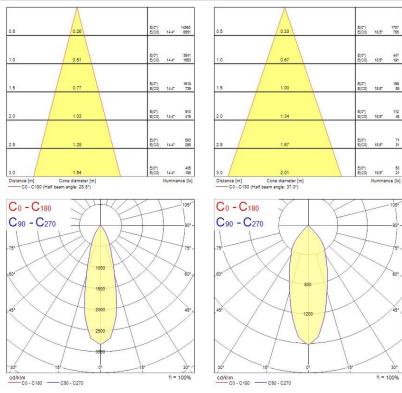

cd/klm C0 - C180 - C90 - C270

TECHNICAL DRAWINGS



Concord

Myriad V Residential LED - Housing only MYRDHS ST 2.7K PHDMEM WHT 2057983

Concord 2057983	
This luminaire contains built in LED lamps.	
A ⁺⁺ A ⁺ A	
The lamps cannot be changed in the luminaire.	
874/2012	
This luminaire contains built in LED lamps.	A ⁺⁺ A ⁺

This luminaire contains built in LED lamps. The lamps cannot be changed in the luminaire. Concord 2057983 874/2012