

Expospot 70 adjustable

EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE

0060247



Product features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 42°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1964lm, 94lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 126mm, outer dimensions: 137x101mm, weight: 0.52kg.



PRODUCT OVERVIEW

IPC Code	0060247
Product name	EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4274742
Fixture luminous flux (lm)	1964
Luminaire efficacy (lm/W)	94
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	42
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288602479
Lamps	No
Included lamp	INTEGRATED LED

Expospot 70 adjustable

EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE

0060247

DATA TABLE

General data

IPC Code	0060247
Product name	EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4274742

Optical data

Fixture luminous flux (lm)	1964
Luminaire efficacy (lm/W)	94
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	42
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Mains voltage (V)	230-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	500
Inrush Current (A)	28
Inrush Duration (µs)	139
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 13A C Breaker	41
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	70
Max. Luminaires per 10A B Breaker	19
Max. Luminaires per 13A B Breaker	25
Max. Luminaires per 16A B Breaker	31
Max. Luminaires per 20A B Breaker	42

Expospot 70 adjustable

EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE
0060247

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	55000



Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Reflector finish	Metallised
Nominal Product Width (mm)	137
Nominal Product Height (mm)	101
Weight (kg)	0.52
Recessed Depth (mm)	101

Packaging


Single packaging type	Carton
Product EAN number	5410288602479
Packaging single length / height (cm)	18.0
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (outer)	05410288602479
Units per outer package	1
Packaging outer length / height (cm)	18.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	16.0

PHOTOMETRY

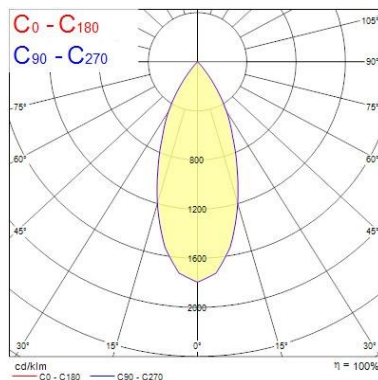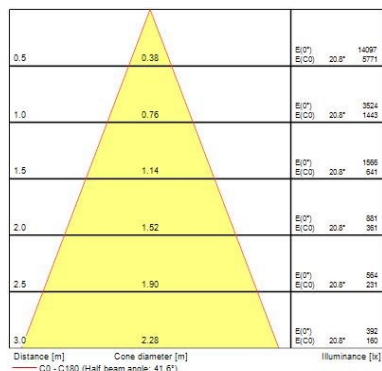



Expospot 70 adjustable EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE 0060247

TECHNICAL DRAWINGS




SYLVANIA 0060247

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Expospot 70 adjustable

EXPOSPOT 70 ADJUSTABLE RA90 4000K MB WHITE

0060247

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0060247

874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED

EUROPEAN UNION

Detailed description: The image shows a rectangular energy label with a blue border. On the left, there is a blue icon of a lamp. To its right, the text reads 'This luminaire contains built in LED lamps.' Below this, a white box contains the text 'The lamps cannot be changed in the luminaire.' In the center, there is a vertical energy efficiency scale with seven colored arrows pointing right, labeled A++, A+, A, B, C, D, and E from top to bottom. A large red 'X' is drawn over the B, C, D, and E categories. To the right of the scale, a blue bracket groups the A++, A+, and A categories, with the letters 'L', 'E', and 'D' stacked vertically next to it. In the top right corner of the label is the European Union flag. At the bottom left, the 'SYLVANIA' logo is in green, followed by the product code '0060247'. At the bottom right, the standard number '874/2012' is printed.