

## Expospot 70 fixed


EXPOSPOT 70 FIXED RA80 4000K NB WHITE

0060228



### Product features

- Integrated LED fixed accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 25°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 2201lm, 105lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 100mm, dimensions: 110x101mm, weight: 0.52kg.

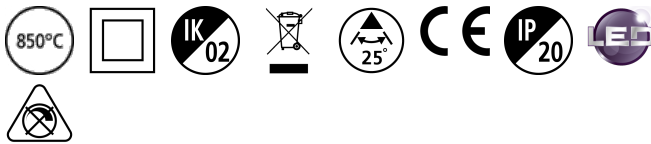

### PRODUCT OVERVIEW

IPC Code	0060228
Product name	EXPOSPOT 70 FIXED RA80 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	2201
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	25
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288602288
Lamps	No
Included lamp	INTEGRATED LED

## Expospot 70 fixed

EXPOSPOT 70 FIXED RA80 4000K NB WHITE  
0060228

### DATA TABLE

#### General data

IPC Code	0060228
Product name	EXPOSPOT 70 FIXED RA80 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744

#### Optical data

Fixture luminous flux (lm)	2201
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	25
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	21
Mains voltage (V)	230-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	500
Inrush Current (A)	28
Inrush Duration (µs)	139
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 13A C Breaker	41
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	70
Max. Luminaires per 10A B Breaker	19
Max. Luminaires per 13A B Breaker	25
Max. Luminaires per 16A B Breaker	31
Max. Luminaires per 20A B Breaker	42

## Expospot 70 fixed EXPOSPOT 70 FIXED RA80 4000K NB WHITE 0060228

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	55000


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Reflector finish	Metallised
Nominal Product Width (mm)	110
Nominal Product Height (mm)	101
Weight (kg)	0.52
Recessed Depth (mm)	101

### Packaging

Single packaging type	Carton
Product EAN number	5410288602288
Packaging single length / height (cm)	18.0
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (outer)	05410288602288
Units per outer package	1
Packaging outer length / height (cm)	18.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	16.0

## PHOTOMETRY

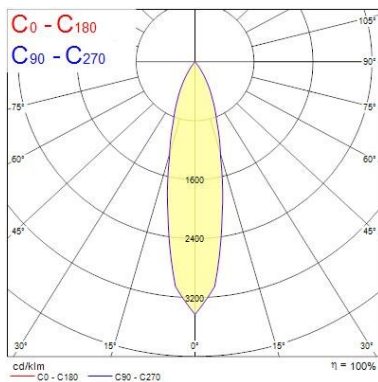


Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	0.22	30196	14181	12.5°
1.0	0.44	7548	3538	12.5°
1.5	0.67	3354	1572	12.5°
2.0	0.89	1937	884	12.5°
2.5	1.11	1207	566	12.5°
3.0	1.33	838	390	12.5°


Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 25.0°)


## Expospot 70 fixed EXPOSPOT 70 FIXED RA80 4000K NB WHITE 0060228

### TECHNICAL DRAWINGS




**SYLVANIA** 0060228

 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

## Expospot 70 fixed


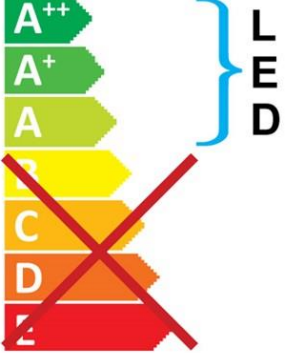
EXPOSPOT 70 FIXED RA80 4000K NB WHITE

0060228



This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



**SYLVANIA** 0060228 874/2012