

Expospot 90 adjustable

EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE

0060266



Product features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 57°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 28W, total fixture output: 3229lm, 115lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 140mm, dimensions: 150x104mm, weight: 0.77kg.



PRODUCT OVERVIEW

IPC Code	0060266
Product name	EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	3229
Luminaire efficacy (lm/W)	115
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	57
Photobiological Risk Group	RG1
Total power consumption (W)	28
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288602660
Lamps	No
Included lamp	INTEGRATED LED

Expospot 90 adjustable

EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE

0060266

DATA TABLE

General data

IPC Code	0060266
Product name	EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	3229
Luminaire efficacy (lm/W)	115
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	57
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	28
Mains voltage (V)	230-240V~
Lamp power factor	0.92
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	700
Inrush Current (A)	19.4
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	35
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	21
Max. Luminaires per 20A B Breaker	27

Expospot 90 adjustable

EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE

0060266

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	55000


Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Reflector finish	Metallised
Nominal Product Width (mm)	150
Nominal Product Height (mm)	104
Weight (kg)	0.77
Recessed Depth (mm)	104

Packaging

Single packaging type	Carton
Product EAN number	5410288602660
Packaging single length / height (cm)	18.0
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (outer)	05410288602660
Units per outer package	1
Packaging outer length / height (cm)	18.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	16.0

PHOTOMETRY

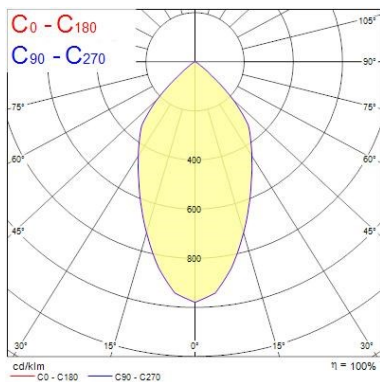

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.54	28.2°	1265 4234
1.0	1.07	28.2°	3181 1084
1.5	1.61	28.2°	1408 482
2.0	2.14	28.2°	790 271
2.5	2.68	28.2°	508 173
3.0	3.22	28.2°	381 120


Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 56.4°)

Expospot 90 adjustable


EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE


0060266

TECHNICAL DRAWINGS




SYLVANIA 0060266

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Expospot 90 adjustable

EXPOSPOT 90 ADJUSTABLE HE RA80 4000K WB WHITE
0060266

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0060266 874/2012

A++
A+
A
B
C
D
E

LED