


## Lumina Lumina Flare LED 2700K 3039984



### Product features

- Ambient decorative Flare LED rectangular vertical wall light with indirect lighting to provide a soft lighting effect, 2700K amber white colour temperature, white aluminium body and integrated LED (non-dimmable) driver, 469 lumens, 12W, 40lm/W, 2700K, IP20, RAL 9003, 30.000hrs

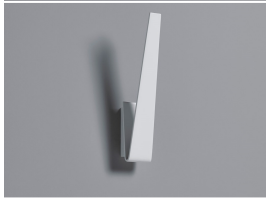

### PRODUCT OVERVIEW

IPC Code	3039984
Product name	Lumina Flare LED 2700K
Technology	LED
Housing	Aluminium
Mount	Wall Surface
Environment	Internal
General application	Hospitality, Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4271115
E-number SE	7502645
Fixture luminous flux (lm)	469
Luminaire efficacy (lm/W)	40
LOR (%)	100
Colour temperature (K)	2700
Light colour	Amber White
CRI (Ra)	85
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	30000
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	8711971399841
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	3039984
Product name	Lumina Flare LED 2700K
Technology	LED
Housing	Aluminium

## Lumina

*Lumina Flare LED 2700K*

3039984

<b>Mount</b>	Wall Surface
<b>Environment</b>	Internal
<b>General application</b>	Hospitality, Residential & Consumer
<b>Certifications</b>	EUNEW009
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4271115
<b>E-number SE</b>	7502645

### Optical data

<b>Fixture luminous flux (lm)</b>	469
<b>Luminaire efficacy (lm/W)</b>	40
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	2700
<b>Light colour</b>	Amber White
<b>CRI (Ra)</b>	85
<b>Adjustable chromaticity</b>	N
<b>Distribution type</b>	Indirect

### Electrical data

<b>Total power consumption (W)</b>	12
<b>Mains voltage (V)</b>	100-240V~
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic
<b>Drive current (mA)</b>	350

### Lifetime data

<b>Average life (Nominal) (h)</b>	30000
-----------------------------------	-------

### Physical data

<b>Housing colour</b>	White
<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>Diffuser finish</b>	Opal
<b>Diffuser material</b>	Polycarbonate
<b>Reflector finish</b>	Diffuser (indirect)
<b>Nominal Product Length (mm)</b>	75
<b>Nominal Product Width (mm)</b>	125
<b>Nominal Product Height (mm)</b>	330
<b>Weight (kg)</b>	0.529

### Packaging

<b>Single packaging type</b>	Carton
<b>Product EAN number</b>	8711971399841
<b>Packaging single length / height (cm)</b>	10.53
<b>Packaging single width (cm)</b>	7.97
<b>Packaging single depth (cm)</b>	34.7
<b>DUN14 (outer)</b>	18711971399848
<b>Units per outer package</b>	20
<b>Packaging outer length / height (cm)</b>	44.5

## Lumina Lumina Flare LED 2700K 3039984


Packaging outer width (cm)	42.5
Packaging outer depth (cm)	36.5

### PHOTOMETRY


Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10</sub> [lx]	E <sub>50</sub> [lx]	E <sub>90</sub> [lx]
0.5	3.38	73.5	73.5	73.5	73.5
1.0	6.75	24	24	24	24
1.5	10.13	11	11	11	11
2.0	13.50	6	6	6	6
2.5	16.88	4	4	4	4
3.0	20.25	3	3	3	3

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 147.0°)

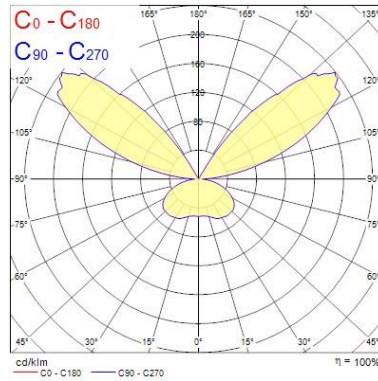



### TECHNICAL DRAWINGS




Lumina  
Lumina Flare LED 2700K  
3039984


**Lumiance** 3039984


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

**Lumiance** 3039984  874/2012