# Concord

### Myriad V Residential LED - Housing only MYRDHS ST 4K DALI BLK 2058014



#### **Product features**

The Myriad Housing 4000K Spot accent downlight is a high efficient 10W recessed spotlight, luminous flux: 1170lm, luminaire efficacy 117lm/W. Colour rendering index Ra>80, Colour temperature 4000K, Beam angle 28ø, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



#### PRODUCT OVERVIEW

IPC Code Product name	2058014 MYRDHS ST 4K DALLBLK	
Product name	MYRDHS ST 4K DALLBLK	
	MYRDHS ST 4K DALI BLK	
Technology	LED	
Housing	Aluminium	
Mount	Ceiling recessed	
Environment	Integral	
General application	Hospitality,Office,Retail,Residential & Consumer	
Certifications	EUNEW008	
ETIM Class	EC001744	
Fixture luminous flux (Im)	1170	
Luminaire efficacy (Im/W)	117	
LOR (%)	100	
Colour temperature (K)	4000	
CRI (Ra)	85	
Beam Angle (°)	28	
Total power consumption (W)	10	
Electrical protection	Class II	
Control gear type	Electronic	
Minimum dimming level (%)	1	
Average life (Nominal) (h)	50000	
Housing colour	Black Trim	
IP rating	IP20	
IK rating	IK02	
Product EAN number	5025768580149	
Lamps	Yes	
Included lamp	INTEGRATED LED	

#### DATA TABLE

General data	
IPC Code	2058014
Product name	MYRDHS ST 4K DALI BLK
Technology	LED
Housing	Aluminium

## Myriad V Residential LED - Housing only MYRDHS ST 4K DALI BLK 2058014


Mount	Ceiling recessed	
Environment	Integral	
General application	Hospitality,Office,Retail,Residential & Consumer	
Operating temperature rated (°C)	25	
Certifications	EUNEW008	
ETIM Class	EC001744	
Optical data		
Fixture luminous flux (Im)	1170	
Luminaire efficacy (Im/W)	117	
LOR (%)	100	
Colour temperature (K)	4000	
CRI (Ra)	85	
Adjustable chromaticity	Ν	
Beam Angle (°)	28	
Distribution type	Direct	
Electrical data		
Total power consumption (W)	10	
Mains voltage (V)	230-240V~	
Electrical protection	Class II	
Control gear type	Electronic	
Minimum dimming level (%)	1	
Drive current (mA)	250	
Nominal Frequency (Hz)	50/60Hz	
Lifetime data		
Average life (Nominal) (h)	50000	
Physical data		
Housing colour	Black Trim	
IP rating	IP20	
IK rating	IK02	
Diffuser finish	Black Trim	
Reflector finish	Aluminium	
Nominal Product Height (mm)	72	
Weight (kg)	0.39	
Recessed Depth (mm)	72	
- 、 /		
Packaging		
Single packaging type	Carton	
Product EAN number	5025768580149	
Packaging single length / height (cm)	17.5	
Packaging single width (cm)	15.0	
Packaging single depth (cm)	17.5	
DUN14 (outer)	05025768580149	
Units per outer package	1	
Packaging outer length / height (cm)	17.5	
Packaging outer width (cm)	15.0	
· actuaging outer matin (enit)	10.0	



## Myriad V Residential LED - Housing only MYRDHS ST 4K DALI BLK 2058014

Packaging outer depth (cm)

\_...

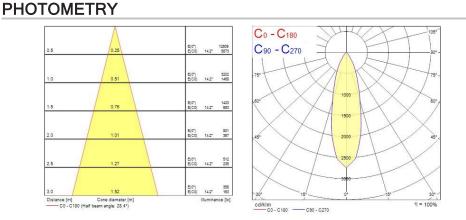

17.5

#### **TECHNICAL DRAWINGS**



## Concord

## Myriad V Residential LED - Housing only MYRDHS ST 4K DALI BLK 2058014

Conco	ord 2058014	
<b></b> c	his luminaire contains built in ED lamps.	
A <sup>++</sup> A <sup>+</sup>		
		od.
in the lumin	cannot be change aire.	
874/2012	1. C.	

