

Ascent 100 II Deco 120

ASCENT 100 II DECO 650 4K STD EMG 120
2060606



Product features

- The ASCENT 100 II DECO 650 4K STD EMG 120 is a high efficient non dimmable downlight luminaire with 3 hour emergency, luminous flux: 653lm, luminaire efficacy: 93lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 137mm



PRODUCT OVERVIEW

| | |
|-----------------------------|---------------------------------------|
| IPC Code | 2060606 |
| Product name | ASCENT 100 II DECO 650 4K STD EMG 120 |
| Technology | LED |
| Housing | Aluminium |
| Mount | Recessed |
| General application | Hospitality, Retail, Office, |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 653 |
| Luminaire efficacy (lm/W) | 93 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Glare control | 20.4 |
| Photobiological Risk Group | Group 0 |
| Total power consumption (W) | 7 |
| Electrical protection | Class II |
| Control gear type | Electronic Emergency |
| Control gear mounting | Remote |
| Dimmable | No |
| Minimum dimming level (%) | 1 |
| Housing colour | White - RAL9016 |
| IP rating | IP40 |
| IK rating | IK02 |
| Product EAN number | 5025768606061 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

Ascent 100 II Deco 120

ASCENT 100 II DECO 650 4K STD EMG 120
2060606

DATA TABLE

General data

| | |
|----------------------------------|---------------------------------------|
| IPC Code | 2060606 |
| Product name | ASCENT 100 II DECO 650 4K STD EMG 120 |
| Technology | LED |
| Housing | Aluminium |
| Mount | Recessed |
| General application | Hospitality,Retail,Office, |
| Operating temperature range (°C) | 0-25 |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |

Optical data

| | |
|----------------------------|---------|
| Fixture luminous flux (lm) | 653 |
| Luminaire efficacy (lm/W) | 93 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam angle (Rated) (°) | 85 |
| Distribution type | Direct |
| Glare control | 20.4 |
| Photobiological Risk Group | Group 0 |
| Emergency duration (h) | 3 |

Electrical data

| | |
|-----------------------------------|----------------------|
| Total power consumption (W) | 7 |
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic Emergency |
| Control gear mounting | Remote |
| Dimmable | No |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 350 |
| Inrush Current (A) | 45 |
| Inrush Duration (µs) | 20 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. Luminaires per 10A C Breaker | 50 |
| Max. Luminaires per 16A C Breaker | 80 |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
| Lumen maintenance - L70 B20 | 60000 |
| Lumen maintenance - L70 B10 | 60000 |
| Lumen maintenance - L80 B50 | 60000 |
| Lumen maintenance - L80 B20 | 60000 |
| Lumen maintenance - L80 B10 | 60000 |

Ascent 100 II Deco 120

ASCENT 100 II DECO 650 4K STD EMG 120
2060606

| | |
|-----------------------------|-------|
| Lumen maintenance - L90 B50 | 60000 |
| Lumen maintenance - L90 B20 | 48000 |
| Lumen maintenance - L90 B10 | 34000 |



Physical data

| | |
|-------------------------------|-----------------|
| Housing colour | White - RAL9016 |
| IP rating | IP40 |
| IK rating | IK02 |
| Diffuser finish | Opal |
| Diffuser material | Acrylic |
| Reflector finish | Deco |
| Nominal Product Width (mm) | 150 |
| Nominal Product Height (mm) | 94 |
| Nominal Product Diameter (mm) | 120 |
| Weight (kg) | 1.43 |

Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768606061 |
| Packaging single length / height (cm) | 30.0 |
| Packaging single width (cm) | 30.0 |
| Packaging single depth (cm) | 12.5 |
| DUN14 (outer) | 05025768606061 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 30.0 |
| Packaging outer width (cm) | 30.0 |
| Packaging outer depth (cm) | 12.5 |

PHOTOMETRY

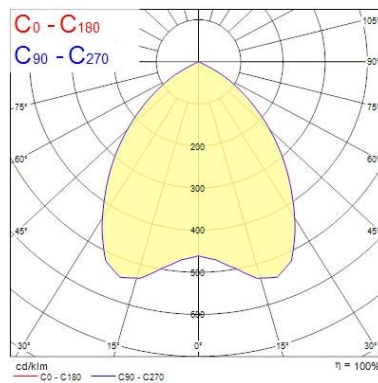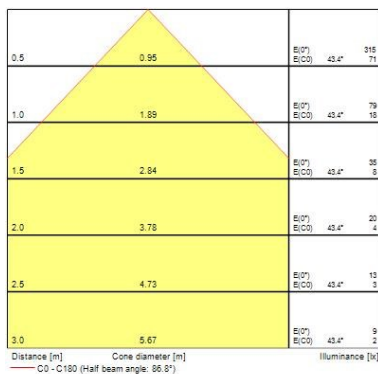


Ascent 100 II Deco 120

ASCENT 100 II DECO 650 4K STD EMG 120
2060606


| | | | | |
|-----|------|----------------|-------|-------------|
| 0.5 | 0.95 | E(0°) E(C0) | 43.4° | 1203 273 |
| 1.0 | 1.89 | E(0°) E(C0) | 43.4° | 301 68 |
| 1.5 | 2.84 | E(0°) E(C0) | 43.4° | 134 30 |
| 2.0 | 3.78 | E(0°) E(C0) | 43.4° | 75 17 |
| 2.5 | 4.73 | E(0°) E(C0) | 43.4° | 48 11 |
| 3.0 | 5.67 | E(0°) E(C0) | 43.4° | 33 8 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 86.8°)

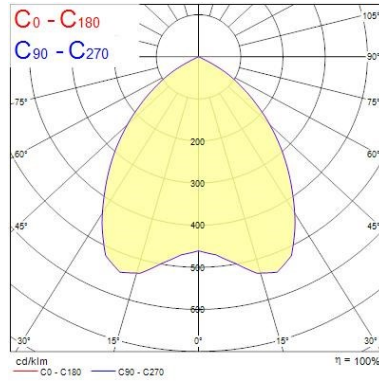


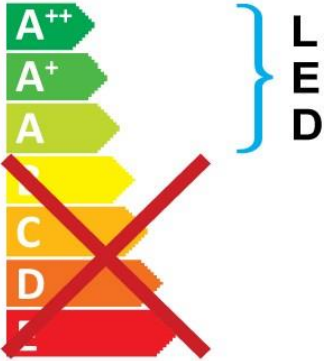
TECHNICAL DRAWINGS




Ascent 100 II Deco 120
ASCENT 100 II DECO 650 4K STD EMG 120
2060606


Concord 2060606


 This luminaire contains built in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

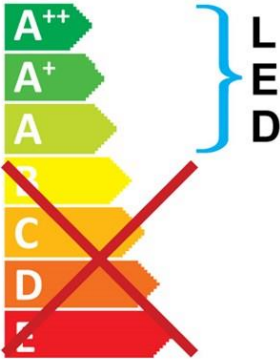

The lamps cannot be changed in the luminaire.

Concord 2060606  874/2012