

Ascent 100 II Deco 160

ASCENT 100 II DECO 1900 3K EMPRO 160
2060644



Product features

- The ASCENT 100 II DECO 1900 3K EMPRO 160 is a high efficient DALI dimmable downlight luminaire with 3 hour EM PRO emergency, luminous flux: 1847lm, luminaire efficacy: 97lm/W, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 178mm



PRODUCT OVERVIEW

| | |
|-----------------------------|--------------------------------------|
| IPC Code | 2060644 |
| Product name | ASCENT 100 II DECO 1900 3K EMPRO 160 |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling Recessed |
| General application | Hospitality, Retail, Office, |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1847 |
| Luminaire efficacy (lm/W) | 97 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 80 |
| Glare control | 23.4 |
| Photobiological Risk Group | Group 0 |
| Total power consumption (W) | 19 |
| Electrical protection | Class II |
| Control gear type | Electronic Emergency |
| Control gear mounting | Remote |
| Dimmable | Yes |
| Housing colour | White - RAL9016 |
| IP rating | IP40 |
| IK rating | IK02 |
| Product EAN number | 5025768606443 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|----------|---------|
| IPC Code | 2060644 |
|----------|---------|

Ascent 100 II Deco 160

ASCENT 100 II DECO 1900 3K EMPRO 160
2060644

| | |
|----------------------------------|--------------------------------------|
| Product name | ASCENT 100 II DECO 1900 3K EMPRO 160 |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling Recessed |
| General application | Hospitality,Retail,Office, |
| Operating temperature range (°C) | 0-25 |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |

Optical data

| | |
|----------------------------|---------|
| Fixture luminous flux (lm) | 1847 |
| Luminaire efficacy (lm/W) | 97 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 80 |
| Beam angle (Rated) (°) | 85 |
| Distribution type | Direct |
| Glare control | 23.4 |
| Photobiological Risk Group | Group 0 |
| Emergency duration (h) | 3 |

Electrical data

| | |
|-----------------------------------|----------------------|
| Total power consumption (W) | 19 |
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class II |
| Control gear required | Yes |
| Control gear type | Electronic Emergency |
| Control gear mounting | Remote |
| Dimmable | Yes |
| Drive current (mA) | 700 |
| Inrush Current (A) | 45 |
| Inrush Duration (µs) | 20 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. Luminaires per 10A C Breaker | 50 |
| Max. Luminaires per 16A C Breaker | 80 |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
| Lumen maintenance - L70 B20 | 60000 |
| Lumen maintenance - L70 B10 | 60000 |
| Lumen maintenance - L80 B50 | 60000 |
| Lumen maintenance - L80 B20 | 60000 |
| Lumen maintenance - L80 B10 | 60000 |
| Lumen maintenance - L90 B50 | 60000 |
| Lumen maintenance - L90 B20 | 34000 |
| Lumen maintenance - L90 B10 | 48000 |

Physical data

Ascent 100 II Deco 160


ASCENT 100 II DECO 1900 3K EMPRO 160
2060644

| | |
|-------------------------------|-----------------|
| Housing colour | White - RAL9016 |
| IP rating | IP40 |
| IK rating | IK02 |
| Diffuser finish | Light Opal |
| Diffuser material | Arcylic |
| Reflector finish | Deco |
| Nominal Product Width (mm) | 150 |
| Nominal Product Height (mm) | 94 |
| Nominal Product Diameter (mm) | 160 |
| Weight (kg) | 1.92 |

Packaging


| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768606443 |
| Packaging single length / height (cm) | 30.0 |
| Packaging single width (cm) | 30.0 |
| Packaging single depth (cm) | 12.5 |
| DUN14 (outer) | 05025768606443 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 30.0 |
| Packaging outer width (cm) | 30.0 |
| Packaging outer depth (cm) | 12.5 |

PHOTOMETRY

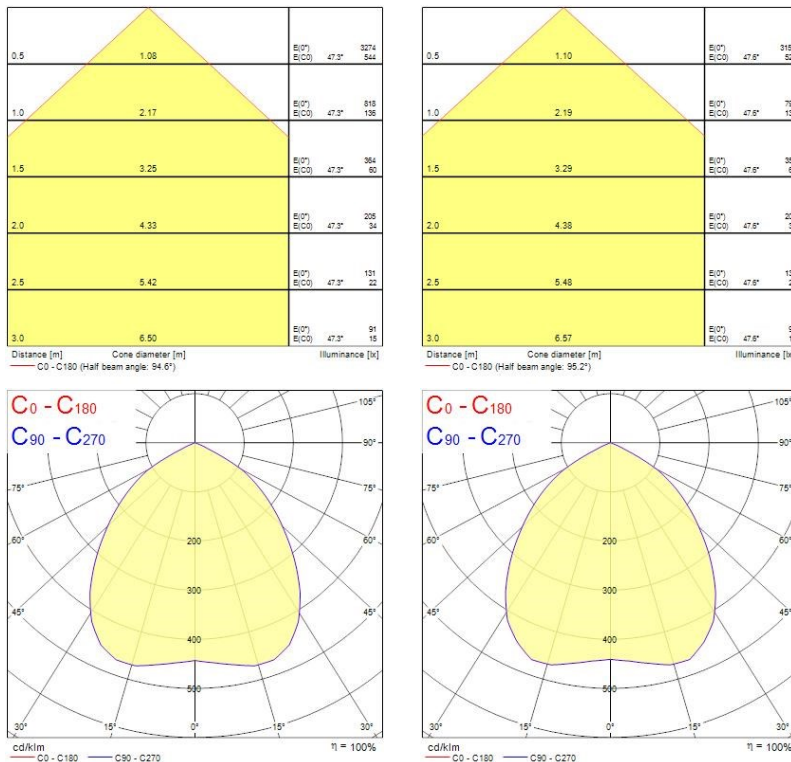



Ascent 100 II Deco 160 ASCENT 100 II DECO 1900 3K EMPRO 160 2060644

TECHNICAL DRAWINGS




Concord 2060644

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Ascent 100 II Deco 160
ASCENT 100 II DECO 1900 3K EMPRO 160
2060644

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

Concord 2060644 874/2012

A++
A+
A
B
C
D
E

LED