

SylBay Gen 2 - DALI

SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DAL

0039987



Product features

- Logistics and Industry modular high bay luminaire with medium optics to provide clear visibility for shelf areas. Single body with 2 optical modules, 9,745 lumens, 64W, 152lm/W, 4000K, CRI 80, medium beam optic, DALI dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08, (LxWxH) 410x386x133mm.



PRODUCT OVERVIEW

IPC Code	0039987
Product name	SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DAL
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC001716
E-number FI	4309007
Fixture luminous flux (lm)	9745
Luminaire efficacy (lm/W)	152
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	64
Electrical protection	Class I
Control gear type	DALI
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288399874
Lamps	No
Included lamp	INTEGRATED LED

SylBay Gen 2 - DALI

SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DAL

0039987

DATA TABLE

General data

IPC Code	0039987
Product name	SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DAL
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC001716
E-number FI	4309007

Optical data

Fixture luminous flux (lm)	9745
Luminaire efficacy (lm/W)	152
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	64
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	DALI
Control gear mounting	Integral
Dimmable	Yes
Drive current (mA)	700
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	11
Max. Luminaires per 13A C Breaker	16
Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 20A C Breaker	25
Max. Luminaires per 10A B Breaker	7
Max. Luminaires per 13A B Breaker	10
Max. Luminaires per 16A B Breaker	12
Max. Luminaires per 20A B Breaker	15

Lifetime data

Lumen maintenance - L70 B50	50000
-----------------------------	-------

SylBay Gen 2 - DALI

SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DALI
0039987



Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Polished
Diffuser material	Polycarbonate
Nominal Product Length (mm)	410
Nominal Product Width (mm)	386
Nominal Product Height (mm)	133
Weight (kg)	4.9


Packaging

Single packaging type	Carton
Product EAN number	5410288399874
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288399874
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	21.0

PHOTOMETRY

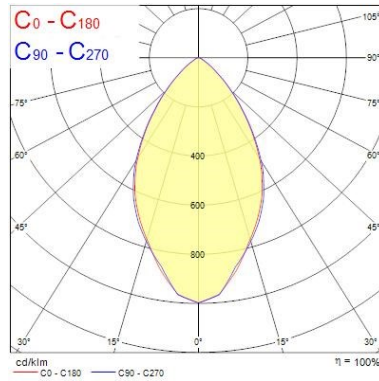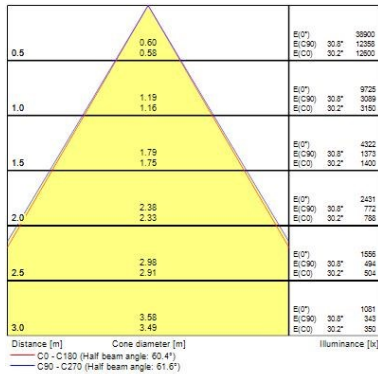


TECHNICAL DRAWINGS




SylBay Gen 2 - DALI


SYLBAY 4000K SINGLE L2HO MEDIUM OPTIC DALI
0039987


SYLVANIA 0039987


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0039987  874/2012