

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI MW

0048780



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, GRP housing, PMMA diffuser, DALI dimmable, with MW sensor, 4000K, CRI80, 5550 lm, 37 W, 150 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



PRODUCT OVERVIEW

IPC Code	0048780
Product name	HYDROPROOF LED G3 1200mm Twin 4K DALI MW
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW023
ETIM Class	EC000109
E-number FI	4306994
Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	150
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	37
Electrical protection	Class I
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487809
Lamps	Yes
Included lamp	INTEGRATED LED

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI MW

0048780

DATA TABLE

General data

IPC Code	0048780
Product name	HYDROPROOF LED G3 1200mm Twin 4K DALI MW
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting or suspended mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW023
ETIM Class	EC000109
E-number FI	4306994

Optical data

Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	150
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	37
Mains voltage (V)	220-240V~
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic dimmable DALI
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	DC/50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI MW

0048780

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear
Diffuser material	PMMA
Nominal Product Length (mm)	1278
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.09

Packaging

Single packaging type	Carton
Product EAN number	5410288487809
Packaging single length / height (cm)	137.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487809
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Safety data


Dry applications use only	No
---------------------------	----

PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°) E(C90) E(C0)	7432 900 725
0.5	1.25 1.41	E(0°) E(C90) E(C0)	1888 226 151
1.0	2.51 2.81	E(0°) E(C90) E(C0)	838 100 81
1.5	3.76 4.22	E(0°) E(C90) E(C0)	464 56 45
2.0	5.01 5.63	E(0°) E(C90) E(C0)	297 36 29
2.5	6.26 7.04	E(0°) E(C90) E(C0)	206 26 20
3.0	7.52 8.44	E(0°) E(C90) E(C0)	151 19 14

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.2°)
— C90 - C270 (Half beam angle: 102.6°)

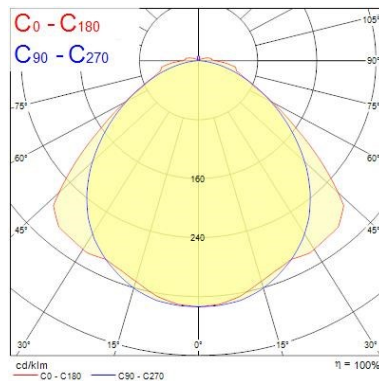


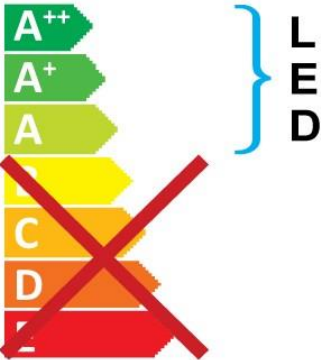
Hydroproof LED G3 DALI *HYDROPROOF LED G3 1200mm Twin 4K DALI MW* 0048780

TECHNICAL DRAWINGS




SYLVANIA 0048780

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Hydroproof LED G3 DALI

HYDROPROOF LED G3 1200mm Twin 4K DALI MW

0048780

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0048780 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED