

Officelyte LED

OFFICELYTE 600X600 HO 4K DALI

2069256



Product features

- Concord OFFICELYTE 600X600 HO 4K DALI is a high performance low glare luminaire for offices and education applications. Ceiling recessed 600x600mm. Micro Prismatic optics. White RAL 9010. DALI dimmable. 4000K Neutral White LED, Typical CRI=85, chromaticity tolerance of 3-step MacAdam ellipse, lumen package of 4,570lm, total power consumption 32W, efficacy of 143lm/W. Lumen maintenance of L80B10 at 60,000 hours, L90B10 at 34,000 hours, UGR<19. IK02, IP20, Electrical Protection Class I, Photobiological Risk Group 1. PMMA diffuser, Glow Wire test 650°C.



PRODUCT OVERVIEW

| | |
|-----------------------------|--------------------------------------|
| IPC Code | 2069256 |
| Product name | OFFICELYTE 600X600 HO 4K DALI |
| Technology | LED |
| Housing | Zintec |
| Mount | Recessed |
| Fixture rating | Enclosed |
| General application | Office,Hospitality,Retail,Education, |
| Certifications | EUNEW008 |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 4570 |
| Luminaire efficacy (lm/W) | 143 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Glare control | UGR<19 |
| Photobiological Risk Group | RG01 |
| Total power consumption (W) | 32 |
| Electrical protection | Class I |
| Control gear type | DALI |
| Control gear mounting | Remote |
| Housing colour | White - RAL9016 |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768692569 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|--------------|-------------------------------|
| IPC Code | 2069256 |
| Product name | OFFICELYTE 600X600 HO 4K DALI |
| Technology | LED |

Officelyte LED

OFFICELYTE 600X600 HO 4K DALI
2069256

| | |
|---------------------|--------------------------------------|
| Housing | Zintec |
| Mount | Recessed |
| Fixture rating | Enclosed |
| General application | Office,Hospitality,Retail,Education, |
| Certifications | EUNEW008 |
| ETIM Class | EC002892 |

Optical data

| | |
|----------------------------|---------------|
| Fixture luminous flux (lm) | 4570 |
| Luminaire efficacy (lm/W) | 143 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Distribution type | Direct |
| Glare control | UGR<19 |
| Photobiological Risk Group | RG01 |

Electrical data

| | |
|-----------------------------------|-----------|
| Total power consumption (W) | 32 |
| Mains voltage (V) | 230-240V~ |
| Lamp power factor | 0.98 |
| Electrical protection | Class I |
| Control gear required | Yes |
| Control gear type | DALI |
| Control gear mounting | Remote |
| Drive current (mA) | 850 |
| Inrush Current (A) | 28 |
| Inrush Duration (µs) | 195 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. Luminaires per 10A C Breaker | 21 |
| Max. Luminaires per 13A C Breaker | 30 |
| Max. Luminaires per 16A C Breaker | 36 |
| Max. Luminaires per 20A C Breaker | 46 |
| Max. Luminaires per 10A B Breaker | 13 |
| Max. Luminaires per 13A B Breaker | 18 |
| Max. Luminaires per 16A B Breaker | 22 |
| Max. Luminaires per 20A B Breaker | 28 |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
| Lumen maintenance - L70 B20 | 60000 |
| Lumen maintenance - L70 B10 | 60000 |
| Lumen maintenance - L80 B50 | 60000 |
| Lumen maintenance - L80 B20 | 60000 |
| Lumen maintenance - L80 B10 | 60000 |
| Lumen maintenance - L90 B50 | 60000 |

Officelyte LED

OFFICELYTE 600X600 HO 4K DALI
2069256

| | |
|-----------------------------|-------|
| Lumen maintenance - L90 B20 | 48000 |
| Lumen maintenance - L90 B10 | 34000 |

Physical data

| | |
|-----------------------------|-----------------|
| Housing colour | White - RAL9016 |
| IP rating | IP20 |
| IK rating | IK02 |
| Diffuser finish | Satine |
| Diffuser material | Acrylic |
| Nominal Product Length (mm) | 595 |
| Nominal Product Width (mm) | 595 |
| Nominal Product Height (mm) | 87 |
| Weight (kg) | 6.0 |
| Recessed Depth (mm) | 200 |

Packaging


| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5025768692569 |
| Packaging single length / height (cm) | 63.5 |
| Packaging single width (cm) | 73.0 |
| Packaging single depth (cm) | 15.5 |
| DUN14 (outer) | 05025768692569 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 63.5 |
| Packaging outer width (cm) | 73.0 |
| Packaging outer depth (cm) | 15.5 |

PHOTOMETRY

| Distance [m] | Cone diameter [m] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|-------|--------|-------|
| 0.5 | 1.14 0.82 | 8662 | 1236 | 1992 |
| 1.0 | 2.28 1.65 | 2166 | 310 | 498 |
| 1.5 | 3.43 2.47 | 962 | 138 | 221 |
| 2.0 | 4.57 3.30 | 541 | 77 | 125 |
| 2.5 | 5.71 4.12 | 348 | 50 | 80 |
| 3.0 | 6.86 4.95 | 241 | 34 | 54 |

Distance [m] Cone diameter [m] Illuminance [lx]


— C0 - C180 (Half beam angle: 79.0°)
— C90 - C270 (Half beam angle: 97.6°)

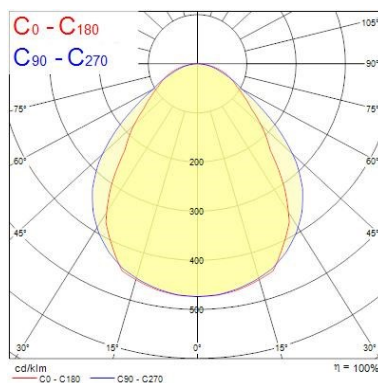


TECHNICAL DRAWINGS


Officelyte LED

OFFICELYTE 600X600 HO 4K DALI
2069256




Concord 2069256

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Officelyte LED

OFFICELYTE 600X600 HO 4K DALI
2069256

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

LED

Concord 2069256 874/2012