

SylBatten LED


SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3

0045206



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP4 = 4 core), sheet steel, 4377LM, 39W, 112m/W, 6000K, drive current: 350mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), integral 3 hour maintained emergency, IP20, IK07, 50,000 hrs (L70), (LxWxH) 1505x66x76mm, 5 step MacAdam ellipse, 3.7kg, white RAL 9016, Class 1, 220-240V, energy class: A++, A+, A.

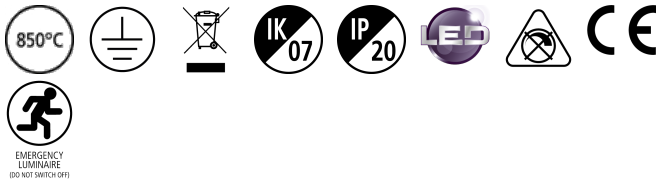

PRODUCT OVERVIEW

IPC Code	0045206
Product name	SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3
Technology	LED
Housing	Sheet steel
Mount	Surface
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	4378
Luminaire efficacy (lm/W)	104.23
LOR (%)	100
Colour temperature (K)	6000
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	30
Photobiological Risk Group	Exempt (Group 0)
Luminous flux (emergency) (lm)	475
Total power consumption (W)	42
Electrical protection	Class I
Control gear type	Electronic
Control gear mounting	Built-in
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Average life (Nominal) (h)	50000
Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288452067

SylBatten LED

SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3
0045206

Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0045206
Product name	SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3
Technology	LED
Housing	Sheet steel
Mount	Surface
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	0 to +25
Certifications	EUNEW002
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	4378
Luminaire efficacy (lm/W)	104.23
LOR (%)	100
Colour temperature (K)	6000
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	138
Distribution type	Direct (symmetrical)
Glare control	30
Photobiological Risk Group	Exempt (Group 0)
Luminous flux (emergency) (lm)	475
Emergency duration (h)	3

Electrical data

Total power consumption (W)	42
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	10
Electrical protection	Class I
Control gear type	Electronic
Control gear mounting	Built-in
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850

SylBatten LED

SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3

0045206

Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	32
Max. Luminaires per 13A C Breaker	42
Max. Luminaires per 16A C Breaker	53
Max. Luminaires per 20A C Breaker	66

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	30000
Lumen maintenance - L70 B10	15000
Lumen maintenance - L80 B50	30000
Lumen maintenance - L80 B20	30000
Lumen maintenance - L80 B10	15000
Lumen maintenance - L90 B50	15000
Lumen maintenance - L90 B20	15000
Lumen maintenance - L90 B10	15000
Average life (Nominal) (h)	50000

Physical data

Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1505
Nominal Product Width (mm)	66
Nominal Product Height (mm)	76
Weight (kg)	3.7


Packaging

Single packaging type	Carton
Product EAN number	5410288452067
Packaging single length / height (cm)	152.0
Packaging single width (cm)	8.0
Packaging single depth (cm)	9.0
DUN14 (outer)	05410288452067
Units per outer package	1
Packaging outer length / height (cm)	152.0
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	9.0

PHOTOMETRY

SylBatten LED

SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3
0045206

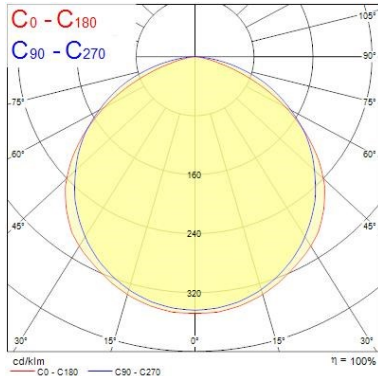


Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]	E _{60°} [lx]	E _{75°} [lx]	E _{90°} [lx]
0.5	1.53 1.51	6096	496	55.8°	512			
1.0	3.06 3.02	1523	124	55.8°	133			
1.5	4.58 4.53	677	55	55.8°	57			
2.0	6.11 6.04	381	31	55.8°	32			
2.5	7.64 7.55	244	20	55.8°	20			
3.0	9.17 9.07	169	14	55.8°	14			

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 113.6°)
 C90 - C270 (Half beam angle: 113.6°)

Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]	E _{60°} [lx]	E _{75°} [lx]	E _{90°} [lx]
0.5	1.21 2.66	4929	630	50.4°	108			
1.0	2.42 5.32	1232	158	50.4°	21			
1.5	3.63 7.98	548	70	50.4°	12			
2.0	4.84 10.64	308	39	50.4°	7			
2.5	6.04 13.30	197	25	50.4°	4			
3.0	7.25 15.96	137	18	50.4°	3			

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 138.8°)
 C90 - C270 (Half beam angle: 100.8°)


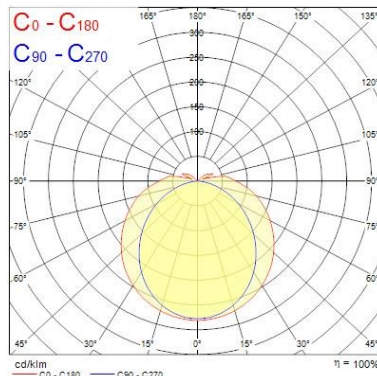


Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]	E _{60°} [lx]	E _{75°} [lx]	E _{90°} [lx]
0.5	1.53 1.51	628	51	56.8°	53			
1.0	3.06 3.02	156	13	56.8°	13			
1.5	4.58 4.53	69	6	56.8°	6			
2.0	6.11 6.04	39	3	56.8°	3			
2.5	7.64 7.55	25	2	56.8°	2			
3.0	9.17 9.07	17	1	56.8°	1			

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 113.6°)
 C90 - C270 (Half beam angle: 113.6°)

Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{10°} [lx]	E _{30°} [lx]	E _{45°} [lx]	E _{60°} [lx]	E _{75°} [lx]	E _{90°} [lx]
0.5	1.21 2.66	538	66	50.4°	12			
1.0	2.42 5.32	134	17	50.4°	3			
1.5	3.63 7.98	69	6	50.4°	1			
2.0	4.84 10.64	38	4	50.4°	1			
2.5	6.04 13.30	21	3	50.4°	0			
3.0	7.25 15.96	15	2	50.4°	0			

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 138.8°)
 C90 - C270 (Half beam angle: 100.8°)

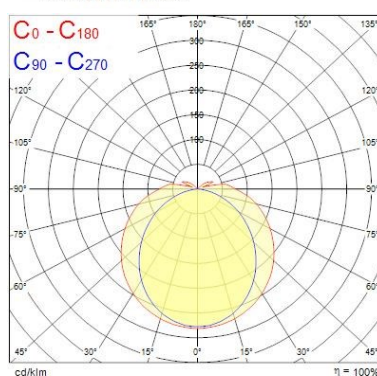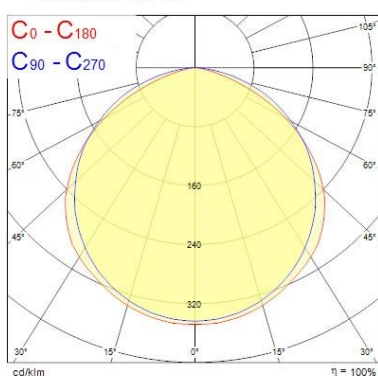

SylBatten LED

SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3
0045206

TECHNICAL DRAWINGS

Version	L	H	W
600mm	600	78	66
1200mm	1200	78	66
1500mm	1500	78	66
1500mm PAR	1500	78	66
1500mm PAR	1500	78	66

Version	L	H1	W1
600mm	600	90	100
1200mm	1200	90	100
1500mm	1500	90	100
1500mm PAR	1500	90	100
1500mm PAR	1500	90	100

SYLVANIA 0045206

This luminaire contains built in LED lamps.

}

L
E
D

The lamps cannot be changed in the luminaire.

874/2012

SylBatten LED

SYLBATTEN LED 1505MM 4000LM 6000K EB (TP4) E3

0045206

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0045206 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED