

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K DALI

2069388



### Product features

- PIXER RECESSED 1200x300 HE 4P 4000K DALI is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1200x300mm, White colour - RAL9010. DALI dimmable, 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 3700 lm, total power consumption 25W, efficacy 148lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. Glow wire test 650°C.



### PRODUCT OVERVIEW

IPC Code	2069388
Product name	PIXER RECESSED 1200X300 HE 4P 4000K DALI
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4262019
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	148
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Remote
Dimmable	Y
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768693887
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2069388
----------	---------

## Pixer Recessed 1200x300

*PIXER RECESSED 1200X300 HE 4P 4000K DALI*

2069388

<b>Product name</b>	PIXER RECESSED 1200X300 HE 4P 4000K DALI
<b>Technology</b>	LED (3 SDCM)
<b>Housing</b>	Powder coated steel
<b>Mount</b>	Recessed (surface mounting with accessory)
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Office,Hospitality,Education,
<b>Certifications</b>	EUNEW008
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4262019

### Optical data

<b>Fixture luminous flux (lm)</b>	3700
<b>Luminaire efficacy (lm/W)</b>	148
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	<19
<b>Photobiological Risk Group</b>	RG0

### Electrical data

<b>Total power consumption (W)</b>	25
<b>Mains voltage (V)</b>	220-240V~
<b>Electrical protection</b>	Class II
<b>Control gear required</b>	No
<b>Control gear type</b>	DALI
<b>Control gear mounting</b>	Remote
<b>Dimmable</b>	Y
<b>Drive current (mA)</b>	800
<b>Inrush Current (A)</b>	28
<b>Inrush Duration (µs)</b>	195
<b>Glow Wire Test (°C)</b>	850
<b>Nominal Frequency (Hz)</b>	50/60Hz
<b>Max. Luminaires per 10A C Breaker</b>	21
<b>Max. Luminaires per 13A C Breaker</b>	30
<b>Max. Luminaires per 16A C Breaker</b>	36
<b>Max. Luminaires per 20A C Breaker</b>	46
<b>Max. Luminaires per 10A B Breaker</b>	13
<b>Max. Luminaires per 13A B Breaker</b>	18
<b>Max. Luminaires per 16A B Breaker</b>	22
<b>Max. Luminaires per 20A B Breaker</b>	28

### Lifetime data

<b>Lumen maintenance - L70 B50</b>	72000
<b>Lumen maintenance - L70 B20</b>	72000
<b>Lumen maintenance - L80 B50</b>	72000
<b>Lumen maintenance - L80 B20</b>	72000
<b>Lumen maintenance - L80 B10</b>	72000
<b>Lumen maintenance - L90 B50</b>	72000

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K DALI  
2069388

Lumen maintenance - L90 B20	66000
Lumen maintenance - L90 B10	61000

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	75
Weight (kg)	6.0
Recessed Depth (mm)	150


### Packaging

Single packaging type	Carton
Product EAN number	5025768693887
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768693887
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

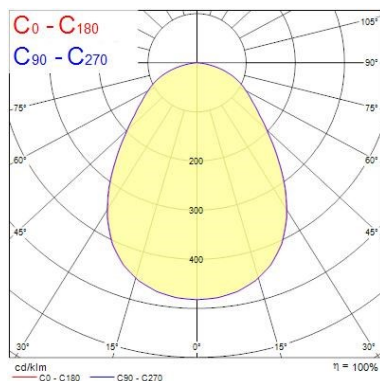

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10</sub> [lx]	E <sub>30</sub> [lx]
0.5	0.59 0.58	7138	1490	1533
1.0	1.18 1.16	1734	373	377
1.5	1.78 1.74	790	198	198
2.0	2.35 2.33	446	90	94
2.5	2.94 2.91	285	60	60
3.0	3.53 3.49	198	41	42

Distance [m]      Cone diameter [m]      Illuminance [lx]


— C0 - C180 (Half beam angle: 32.3°)  
— C90 - C270 (Half beam angle: 83.2°)

## TECHNICAL DRAWINGS


## Pixer Recessed 1200x300


PIXER RECESSED 1200X300 HE 4P 4000K DALI

2069388





**Concord** 2069388



 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED** 

The lamps cannot be changed in the luminaire.

**Concord** 2069388 874/2012

## Pixer Recessed 1200x300

*PIXER RECESSED 1200X300 HE 4P 4000K DALI*

**2069388**

---