


## Start Track Spot Large

START Track Spot L 4900lm 940 MB BLK  
0004905



### Product features

- Integrated LED spotlight, Textured Black - RAL9005, compact and minimalist design, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 38°, color temperature: 4000K, total system power: 55W, total fixture output: 4897 lm, LOR: 100%, colour rendering: Ra: 90 typical, LED Chromaticity: 3 step MacAdam ellipse, lifetime: >50000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1400mA, electronic driver, non-dimmable, power factor: 0.96, electrical protection: Class II, Global Track 3 Phase adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x164x240, weight: 1.398kg.

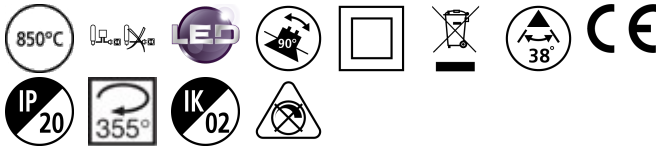

### PRODUCT OVERVIEW

IPC Code	0004905
Product name	START Track Spot L 4900lm 940 MB BLK
Technology	LED
Housing	ADC12 Aluminium
Mount	Global Track
Fixture rating	Enclosed
General application	Retail,
Certifications	EUNEW010
ETIM Class	EC001744
E-number FI	4274441
E-number SE	7401846
Fixture luminous flux (lm)	4897
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	55
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Average life (Nominal) (h)	50000
Housing colour	Texture Blk Polyester - Ral 9005
IP rating	IP20
IK rating	IK02
Product EAN number	5410288049052

## Start Track Spot Large

*START Track Spot L 4900lm 940 MB BLK*  
0004905

Lamps	No
Included lamp	Integrated LED

### DATA TABLE

#### General data

IPC Code	0004905
Product name	START Track Spot L 4900lm 940 MB BLK
Technology	LED
Housing	ADC12 Aluminium
Mount	Global Track
Fixture rating	Enclosed
General application	Retail,
Operating temperature range (°C)	0 to +25°C
Certifications	EUNEW010
ETIM Class	EC001744
E-number FI	4274441
E-number SE	7401846

#### Optical data

Fixture luminous flux (lm)	4897
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	38
Distribution type	Medium Beam
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	55
Current (A)	0.23
Mains voltage (V)	230-240V~
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15.1
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic
Control gear mounting	Integral
Dimmable	No
Drive current (mA)	1400
Inrush Current (A)	12
Inrush Duration (µs)	50
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)

## Start Track Spot Large

START Track Spot L 4900lm 940 MB BLK  
0004905

Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 13A C Breaker	35
Max. Luminaires per 16A C Breaker	45
Max. Luminaires per 20A C Breaker	55
Max. Luminaires per 10A B Breaker	20
Max. Luminaires per 13A B Breaker	35
Max. Luminaires per 16A B Breaker	45
Max. Luminaires per 20A B Breaker	55

### Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	50000
Lumen maintenance - L70 B10	50000
Lumen maintenance - L80 B50	50000
Lumen maintenance - L80 B20	50000
Lumen maintenance - L80 B10	50000
Lumen maintenance - L90 B50	50000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	50000
Average life (Nominal) (h)	50000

### Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	355
Housing colour	Texture Blk Polyester - Ral 9005
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Reflector finish	Faceted
Nominal Product Width (mm)	164
Nominal Product Height (mm)	240
Weight (kg)	1.398

### Packaging

Single packaging type	Carton
Product EAN number	5410288049052
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05410288049052
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0


### Safety data

Dry applications use only	Yes
---------------------------	-----

## Start Track Spot Large

START Track Spot L 4900lm 940 MB BLK  
0004905


### PHOTOMETRY

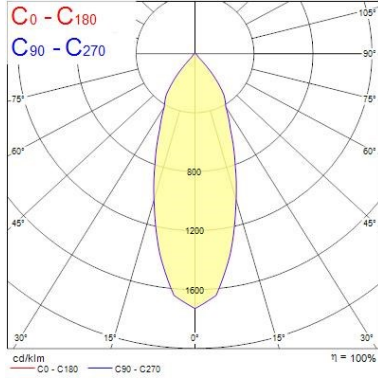

0.5	0.34	E <sub>(0°)</sub> E <sub>(C0)</sub>	33880 14417
1.0	0.68	E <sub>(0°)</sub> E <sub>(C0)</sub>	8465 3604
1.5	1.02	E <sub>(0°)</sub> E <sub>(C0)</sub>	3782 1602
2.0	1.35	E <sub>(0°)</sub> E <sub>(C0)</sub>	2116 901
2.5	1.69	E <sub>(0°)</sub> E <sub>(C0)</sub>	1324 577
3.0	2.03	E <sub>(0°)</sub> E <sub>(C0)</sub>	941 400

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 37.4°)


### TECHNICAL DRAWINGS




## Start Track Spot Large


START Track Spot L 4900lm 940 MB BLK  
0004905


**SYLVANIA** 0004905


 This luminaire contains built in LED lamps.

 } **L  
E  
D**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **L  
E  
D**

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0004905  874/2012