


Optix Recessed 600x600 High Output

OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM
0044247



Product features

- OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected Building capable. 3hr combined maintained emergency version. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 4500lm. Power consumption 34W. Luminaire efficacy 132lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044247
Product name	OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW022
ETIM Class	EC002892
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	1
Total power consumption (W)	34
Electrical protection	Class I
Control gear type	SylSmart SSH
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288442471
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Optix Recessed 600x600 High Output

OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM
0044247

General data

IPC Code	0044247
Product name	OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office,Education,
Certifications	EUNEW022
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	132
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	1
Emergency duration (h)	3

Electrical data

Total power consumption (W)	34
Mains voltage (V)	220-240V~
Lamp power factor	0.96
Electrical protection	Class I
Control gear required	No
Control gear type	SylSmart SSH
Dimmable	Yes
Drive current (mA)	240
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	56

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	46000

Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin


Optix Recessed 600x600 High Output OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM 0044247

Diffuser material	Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

Packaging


Single packaging type	Carton
Product EAN number	5410288442471
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288442471
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

PHOTOMETRY

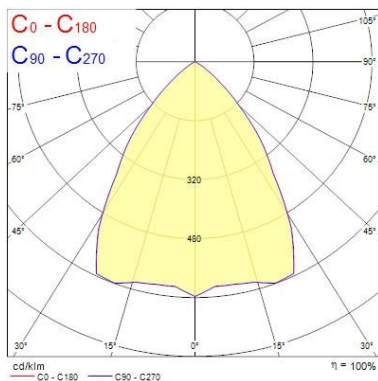

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	0.77	11482	37.7°	2862
	0.77		37.6°	2370
1.0	1.55	2865	37.7°	713
	1.54		37.6°	576
1.5	2.32	1271	37.7°	317
	2.31		37.6°	259
2.0	3.09	716	37.7°	178
	3.08		37.6°	145
2.5	3.86	485	37.7°	114
	3.85		37.6°	93
3.0	4.64	318	37.7°	79
	4.62		37.6°	64

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 75.2°)
 C90 - C270 (Half beam angle: 75.4°)

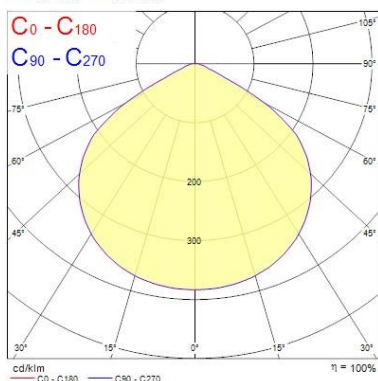


Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	1.51	133	56.4°	10
1.0	3.01	33	56.4°	3
1.5	4.52	14	56.4°	1
2.0	6.02	8	56.4°	1
2.5	7.53	5	56.4°	0
3.0	9.03	3	56.4°	0


Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 112.6°)
 C90 - C270 (Half beam angle: 112.8°)


TECHNICAL DRAWINGS

Optix Recessed 600x600 High Output *OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM* 0044247




SYLVANIA 0044247

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Optix Recessed 600x600 High Output *OPTIX RECESSED 600x600 3L HO 4000K ALU SSH EM* 0044247

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0044247 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED