


## Start Flat Panel LED 1200x300

START FLAT PANEL LED 1200 NW  
0047438



### Product features

- Edge lit LED flat panel. 45 W, Neutral white, 3700 K, 4000 lumens, 82 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 1195 x 295 mm



### PRODUCT OVERVIEW

IPC Code	0047438
Product name	START FLAT PANEL LED 1200 NW
Technology	LED
Housing	Powder coated steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274375
E-number SE	7013619
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Glare control	UGR <25
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	45
Electrical protection	Class II
Control gear type	Electronic
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP20
IK rating	IK05
Product EAN number	5410288474380
Included lamp	INTEGRATED LED

## Start Flat Panel LED 1200x300

START FLAT PANEL LED 1200 NW  
0047438

### DATA TABLE

#### General data

IPC Code	0047438
Product name	START FLAT PANEL LED 1200 NW
Technology	LED
Housing	Powder coated steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Education,Hospitality,Office,Retail
Operating temperature range (°C)	-10 to +40
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4274375
E-number SE	7013619

#### Optical data

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Direct
Glare control	UGR <25
Photobiological Risk Group	Exempt Group 0

#### Electrical data

Total power consumption (W)	45
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Drive current (mA)	1200
Inrush Current (A)	10
Inrush Duration (µs)	130
Glow Wire Test (°C)	650
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	16

#### Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

#### Physical data

Housing colour	White
----------------	-------

## Start Flat Panel LED 1200x300


START FLAT PANEL LED 1200 NW  
0047438

IP rating	IP20
IK rating	IK05
Diffuser finish	Opal
Diffuser material	Acrylic PMMA
Reflector finish	Diffuser
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	10.5
Weight (kg)	3.066
Recessed Depth (mm)	100


### Packaging

Single packaging type	Carton
Product EAN number	5410288474380
Packaging single length / height (cm)	128.7
Packaging single width (cm)	33.0
Packaging single depth (cm)	3.8
DUN14 (outer)	15410288474387
Units per outer package	2
Packaging outer length / height (cm)	130.7
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	10.8

## PHOTOMETRY

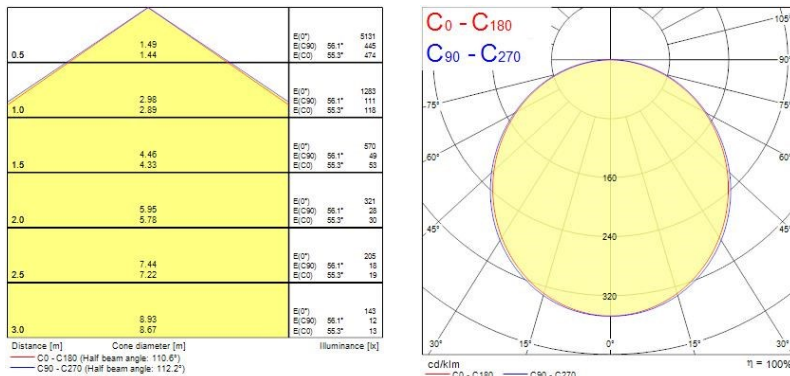

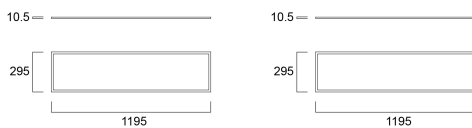

## TECHNICAL DRAWINGS




## Start Flat Panel LED 1200x300 START FLAT PANEL LED 1200 NW 0047438


**SYLVANIA** 0047438


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0047438  874/2012