

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 3L SO 4000K WHITE

0044111



Product features

- OPTIX RECESSED 600x600 3L SO 4000K WHITE is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. White plastic low glare optics in 3 lines configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2900lm. Power consumption 20W. Luminaire efficacy 145lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<19, Luminance at 65°<3000 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044111
Product name	OPTIX RECESSED 600x600 3L SO 4000K WHITE
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4276546
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	19
Photobiological Risk Group	0
Total power consumption (W)	20
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288441115
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044111
----------	---------

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 3L SO 4000K WHITE
0044111

Product name	OPTIX RECESSED 600x600 3L SO 4000K WHITE
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4276546

Optical data

Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	19
Photobiological Risk Group	0

Electrical data

Total power consumption (W)	20
Starting time (max) (s)	<0.5
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	375
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31
Max. Luminaires per 16A B Breaker	38
Max. Luminaires per 20A B Breaker	48

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 3L SO 4000K WHITE
0044111

Lumen maintenance - L90 B10	46000
-----------------------------	-------


Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

Packaging


Single packaging type	Carton
Product EAN number	5410288441115
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288441115
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

PHOTOMETRY

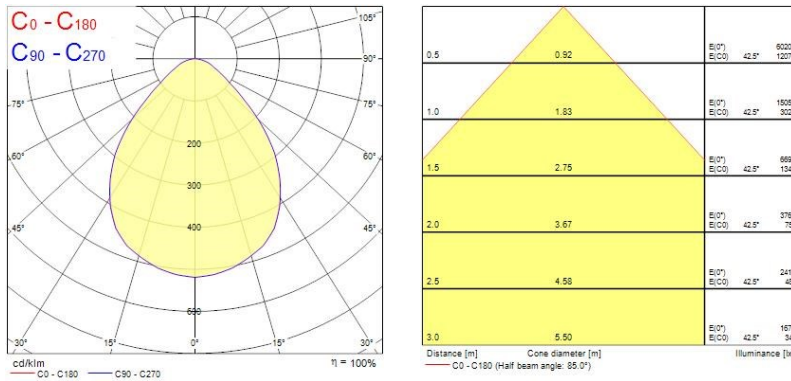



TECHNICAL DRAWINGS

Optix Recessed 600x600 Standard Output *OPTIX RECESSED 600x600 3L SO 4000K WHITE* 0044111




SYLVANIA 0044111

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Optix Recessed 600x600 Standard Output
OPTIX RECESSED 600x600 3L SO 4000K WHITE
0044111

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0044111 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED