

Officelyte Classic Fluorescent

OfficeLyte Classic FLUO 1x40W DALI

2057435



Product features

- OfficeLyte Classic FLUO 1x40W DALI



PRODUCT OVERVIEW

IPC Code	2057435
Product name	OfficeLyte Classic FLUO 1x40W DALI
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral
General application	Office
Certifications	EUNEW008
ETIM Class	EC002892
Fixture luminous flux (lm)	2638
Luminaire efficacy (lm/W)	61
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Glare control	UGR < 19
Total power consumption (W)	45
Electrical protection	Class I
Control gear type	Electronic
Minimum dimming level (%)	100
Average life (Nominal) (h)	50000
Housing colour	White RAL 9010
IP rating	IP40
Product EAN number	5025768574353
Included lamp	0025659

DATA TABLE

General data

IPC Code	2057435
Product name	OfficeLyte Classic FLUO 1x40W DALI
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral

Officelyte Classic Fluorescent

OfficeLyte Classic FLUO 1x40W DALI
2057435

General application	Office
Certifications	EUNEW008
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	2638
Luminaire efficacy (lm/W)	61
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Adjustable chromaticity	N
Distribution type	Direct/Indirect
Glare control	UGR < 19

Electrical data

Total power consumption (W)	45
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	100
Glow Wire Test (°C)	650

Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

Physical data

Housing colour	White RAL 9010
IP rating	IP40
Diffuser finish	Satin
Diffuser material	Acrylic
Reflector finish	Micro Prismatic
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	145
Weight (kg)	7.9
Recessed Depth (mm)	105

Packaging


Single packaging type	Carton
Product EAN number	5025768574353
Packaging single length / height (cm)	62.0
Packaging single width (cm)	62.0
Packaging single depth (cm)	17.0
DUN14 (outer)	05025768574353
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	62.0
Packaging outer depth (cm)	17.0

Officelyte Classic Fluorescent


OfficeLyte Classic FLUO 1x40W DALI
2057435


PHOTOMETRY

TECHNICAL DRAWINGS




Concord 2057435

 This luminaire is compatible with bulbs of the energy classes:




This luminaire is sold with a bulb of the energy class:

874/2012 

Officelyte Classic Fluorescent

OfficeLyte Classic FLUO 1x40W DALI
2057435

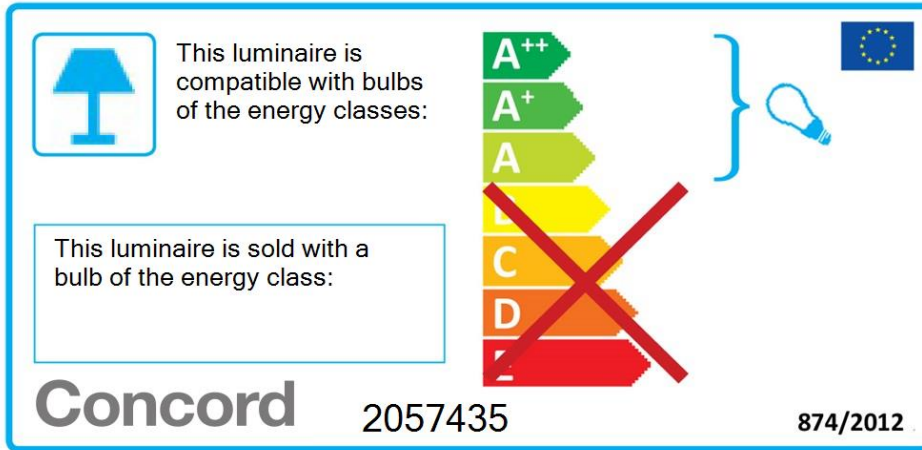

This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:

Concord 2057435 874/2012

The label features a vertical energy scale from A++ (green) to F (red). A red 'X' is drawn over the B, C, D, and E classes. A bracket on the right groups the A++ and A+ classes, with a lightbulb icon next to it. A small European Union flag is in the top right corner.