

## OfficeLyte Classic Fluorescent

### OfficeLyte Classic FLUO 1x40W DALI EMPRO

#### 2057437



#### Product features

- OfficeLyte Classic FLUO 1x40W DALI EMPRO



### PRODUCT OVERVIEW

IPC Code	2057437
Product name	OfficeLyte Classic FLUO 1x40W DALI EMPRO
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral
General application	Office
Certifications	EUNEW001
ETIM Class	EC002892
Fixture luminous flux (lm)	2638
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Glare control	UGR < 19
Total power consumption (W)	45
Electrical protection	Class I
Control gear type	Electronic
Minimum dimming level (%)	100
Average life (Nominal) (h)	50000
Housing colour	White RAL 9010
IP rating	IP40
Product EAN number	5025768574377
Included lamp	0025659

### DATA TABLE

#### General data

IPC Code	2057437
Product name	OfficeLyte Classic FLUO 1x40W DALI EMPRO
Technology	Fluorescent
Housing	Zintec Steel
Mount	Ceiling recessed
Environment	Integral

## Officelyte Classic Fluorescent

*OfficeLyte Classic FLUO 1x40W DALI EMPRO*  
2057437

General application	Office
Certifications	EUNEW001
ETIM Class	EC002892

### Optical data

Fixture luminous flux (lm)	2638
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Adjustable chromaticity	N
Distribution type	Direct/Indirect
Glare control	UGR < 19
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	45
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	100
Glow Wire Test (°C)	650

### Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

### Physical data

Housing colour	White RAL 9010
IP rating	IP40
Diffuser finish	Satin
Diffuser material	Acrylic
Reflector finish	Micro Prismatic
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	145
Weight (kg)	7.9
Recessed Depth (mm)	105

### Packaging

Single packaging type	Carton
Product EAN number	5025768574377
Packaging single length / height (cm)	62.0
Packaging single width (cm)	62.0
Packaging single depth (cm)	17.0
DUN14 (outer)	05025768574377
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	62.0
Packaging outer depth (cm)	17.0

## Officelyte Classic Fluorescent


*OfficeLyte Classic FLUO 1x40W DALI EMPRO*  
2057437

### PHOTOMETRY


---


### TECHNICAL DRAWINGS

---




**Concord** 2057437

 This luminaire is compatible with bulbs of the energy classes:




This luminaire is sold with a bulb of the energy class:

874/2012 

## Officelyte Classic Fluorescent

*OfficeLyte Classic FLUO 1x40W DALI EMPRO*  
2057437

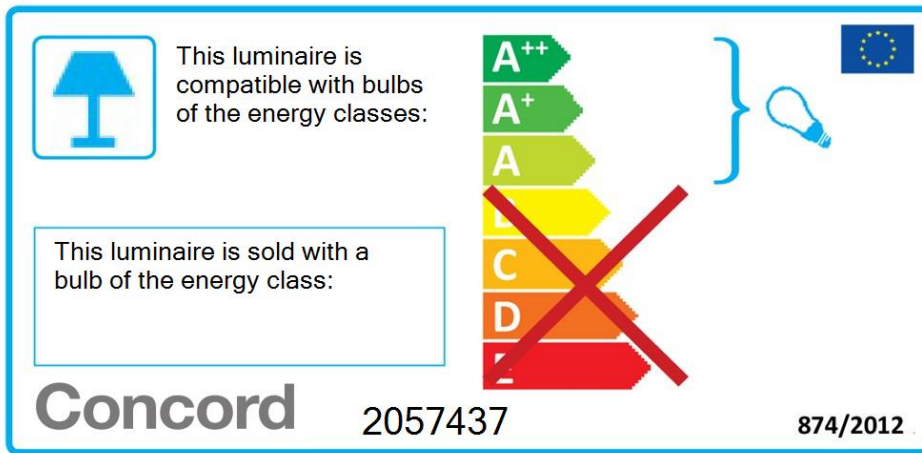

This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:

**Concord** 2057437 874/2012

The energy label features a vertical scale of energy classes from A++ (dark green) to F (red). A red 'X' is drawn over the classes B, C, D, and E. A blue bracket on the right side of the scale groups the classes A, A+, and A++ together, with a small lightbulb icon next to it. The European Union flag is located in the top right corner of the label.