


## Sylproof Superia LED G3 MW

SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW  
0048715



### Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 4000K, CRI80, 6800 lm, 47 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.

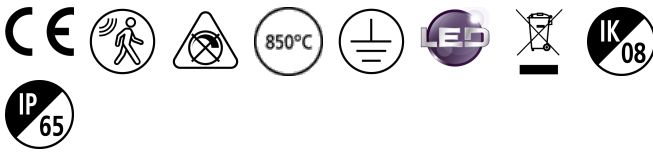

### PRODUCT OVERVIEW

IPC Code	0048715
Product name	SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW
Technology	LED
Housing	Polycarbonate
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW023
ETIM Class	EC000109
Fixture luminous flux (lm)	6800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	47
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487151
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

## Sylproof Superia LED G3 MW

*SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW*

0048715

### General data

IPC Code	0048715
Product name	SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW
Technology	LED
Housing	Polycarbonate
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW023
ETIM Class	EC000109

### Optical data

Fixture luminous flux (lm)	6800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	47
Mains voltage (V)	220-240V~
Mains frequency (Hz)	50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	300
Inrush Current (A)	5
Inrush Duration (µs)	37
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	55
Max. Luminaires per 20A B Breaker	70

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000

## Sylproof Superia LED G3 MW

SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW  
0048715

Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.4


### Packaging

Single packaging type	Carton
Product EAN number	5410288487151
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487151
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

### Safety data

Dry applications use only	No
---------------------------	----

## PHOTOMETRY

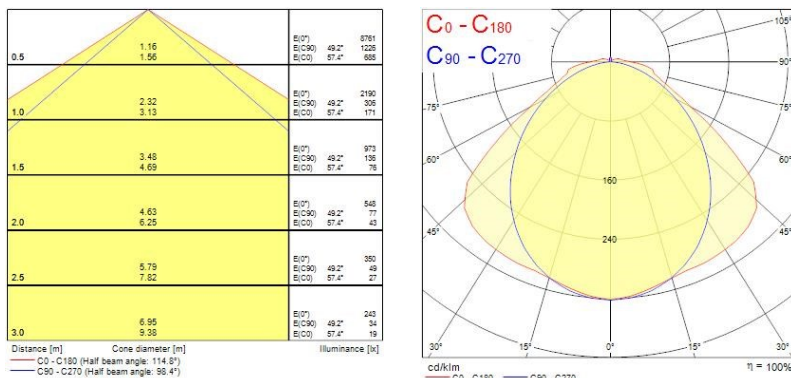

## TECHNICAL DRAWINGS


## Sylproof Superia LED G3 MW


SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW

0048715





**SYLVANIA** 0048715


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0048715  874/2012



Sylproof Superia LED G3 MW

*SYLPROOF SUPERIA LED G3 1500mm Twin 4K MW*

0048715

---