

## Beacon LED Major II


### BEACON MAJOR II 3000K SPOT L1 BLACK

#### 2059877



#### Product features

- Integrated AC LED spotlight, black RAL 9005, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 33° spot, optics: polycarbonate reflector, colour temperature: 3000K warm white, total system power: 19W, total fixture output: 1716lm, luminaire efficacy: 90lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 48,000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, mains dimmable, trailing or leading edge dimmable, power factor: 0.9 electrical protection: CLASS I, 1-circuit track adaptor, suitable for Concord Lytespan 1 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø79x118x140mm, weight: 0.40kg.

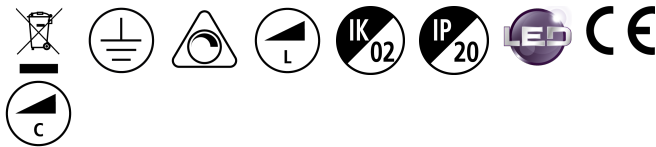

## PRODUCT OVERVIEW

IPC Code	2059877
Product name	BEACON MAJOR II 3000K SPOT L1 BLACK
Technology	LED
Housing	ALUMINIUM
Mount	L1 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260817
E-number SE	7416217
Fixture luminous flux (lm)	1716
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	33
Glare control	UGR>19
Photobiological Risk Group	RG01
Total power consumption (W)	19
Product Voltage (V)	240
Electrical protection	Class I
Dimmable	Yes
Housing colour	BLACK - RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	5025768598779
Lamps	No
Included lamp	INTEGRATED LED

## Beacon LED Major II

*BEACON MAJOR II 3000K SPOT L1 BLACK*  
2059877

### DATA TABLE

#### General data

IPC Code	2059877
Product name	BEACON MAJOR II 3000K SPOT L1 BLACK
Technology	LED
Housing	ALUMINIUM
Mount	L1 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260817
E-number SE	7416217

#### Optical data

Fixture luminous flux (lm)	1716
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	33
Beam angle (Rated) (°)	33
Distribution type	SPOT
Glare control	UGR>19
Photobiological Risk Group	RG01

#### Electrical data

Total power consumption (W)	19
Mains voltage (V)	230-240V~
Product Voltage (V)	240
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Drive current (mA)	0
Nominal Frequency (Hz)	50/60Hz

#### Lifetime data

Lumen maintenance - L70 B50	48000
-----------------------------	-------

#### Physical data

Housing colour	BLACK - RAL9005
IP rating	IP20
IK rating	IK02
Reflector finish	METALISED
Nominal Product Width (mm)	106
Nominal Product Height (mm)	140

## Beacon LED Major II

### BEACON MAJOR II 3000K SPOT L1 BLACK



### 2059877

Nominal Product Diameter (mm)	79
Weight (kg)	0.915


#### Packaging

Single packaging type	Carton
Product EAN number	5025768598779
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	5025768598779
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

## PHOTOMETRY

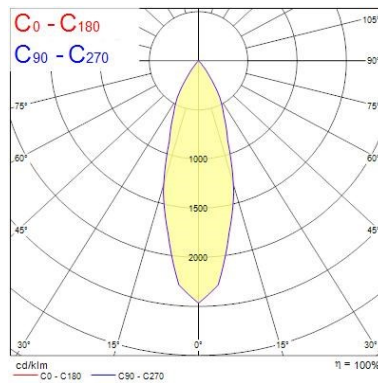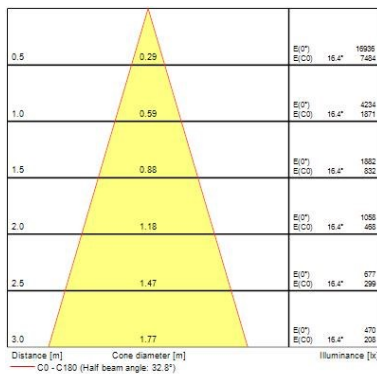



## TECHNICAL DRAWINGS




## Beacon LED Major II BEACON MAJOR II 3000K SPOT L1 BLACK 2059877


**Concord** 2059877


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2059877  874/2012