

Beacon LED Major II


BEACON MAJOR II 4000K SPOT L3 WHITE

2059886



Product features

- Integrated AC LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 33° spot, optics: polycarbonate reflector, colour temperature: 4000K neutral white, total system power: 19W, total fixture output: 1716lm, luminaire efficacy: 90lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 48,000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, mains dimmable, trailing or leading edge dimmable, power factor: 0.9 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø79x118x168mm, weight: 0.40kg.

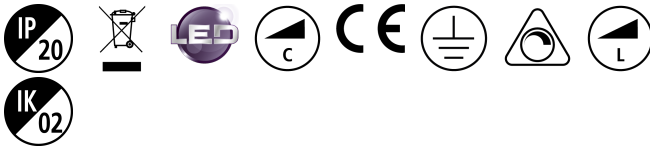

PRODUCT OVERVIEW

IPC Code	2059886
Product name	BEACON MAJOR II 4000K SPOT L3 WHITE
Technology	LED
Housing	ALUMINIUM
Mount	L3 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260828
Fixture luminous flux (lm)	1716
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	33
Glare control	UGR>19
Photobiological Risk Group	RG01
Total power consumption (W)	19
Product Voltage (V)	240
Electrical protection	Class I
Dimmable	Yes
Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768598861
Lamps	No
Included lamp	INTEGRATED LED

Beacon LED Major II

BEACON MAJOR II 4000K SPOT L3 WHITE
2059886

DATA TABLE

General data

IPC Code	2059886
Product name	BEACON MAJOR II 4000K SPOT L3 WHITE
Technology	LED
Housing	ALUMINIUM
Mount	L3 TRACK
General application	Retail,Hospitality,
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4260828

Optical data

Fixture luminous flux (lm)	1716
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	33
Beam angle (Rated) (°)	33
Distribution type	SPOT
Glare control	UGR>19
Photobiological Risk Group	RG01

Electrical data

Total power consumption (W)	19
Mains voltage (V)	230-240V~
Product Voltage (V)	240
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Drive current (mA)	0
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	48000
-----------------------------	-------

Physical data

Housing colour	WHITE - RAL9016
IP rating	IP20
IK rating	IK02
Reflector finish	METALISED
Nominal Product Width (mm)	109
Nominal Product Height (mm)	168
Nominal Product Diameter (mm)	79

Beacon LED Major II


BEACON MAJOR II 4000K SPOT L3 WHITE
2059886

Weight (kg) 0.915

Packaging

Single packaging type	Carton
Product EAN number	5025768598861
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	5025768598861
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

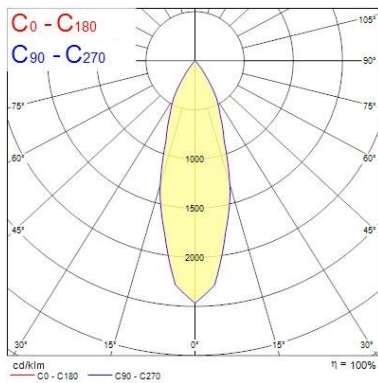

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]
0.5	0.29	1696	16.4°	754
1.0	0.59	4234	16.4°	1871
1.5	0.88	1862	16.4°	852
2.0	1.18	1038	16.4°	488
2.5	1.47	677	16.4°	309
3.0	1.77	470	16.4°	208


Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 32.8°)


TECHNICAL DRAWINGS




Beacon LED Major II BEACON MAJOR II 4000K SPOT L3 WHITE 2059886


Concord 2059886


 This luminaire contains built in LED lamps.

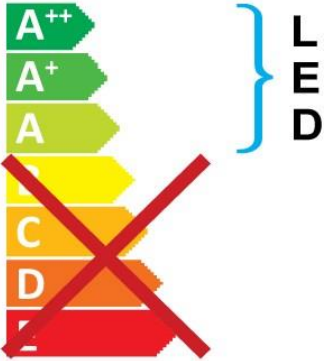


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

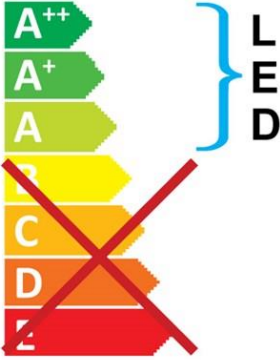

The lamps cannot be changed in the luminaire.

Concord 2059886  874/2012