### Ascent 50 Round - 12 LED Standard Output ASCENT 50 RND SO DALI 3K 2052664



#### **Product features**

• ASCENT 50 RND SO DALI 3K













### **PRODUCT OVERVIEW**

IPC Code	2052664
Product name	ASCENT 50 RND SO DALI 3K
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Interior
General application	Museums & Galleries, Retail
Certifications	EUNEW008
ETIM Class	EC001744
Colour temperature (K)	3000
CRI (Ra)	85
Photobiological Risk Group	-
Total power consumption (W)	21
Electrical protection	Class I
Control gear mounting	Integral
Housing colour	Aluminium
IP rating	IP23
IK rating	IK02
Product EAN number	5025768526642
Lamps	No
Included lamp	INTEGRATED LED

### **DATA TABLE**

General data	
IPC Code	2052664
Product name	ASCENT 50 RND SO DALI 3K
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Interior
General application	Museums & Galleries,Retail
Certifications	EUNEW008
ETIM Class	EC001744




# Ascent 50 Round - 12 LED Standard Output ASCENT 50 RND SO DALI 3K 2052664


Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Distribution type	Direct symmetrical
Photobiological Risk Group	-
Electrical data	
Total power consumption (W)	21
Mains voltage (V)	230V~
Electrical protection	Class I
Control gear mounting	Integral
Transformer required	Yes
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50/60Hz
Lifetime data	
1 170 DEC	50000
Lumen maintenance - L70 B50	30000
Lumen maintenance - L/U B50	30000
Physical data	30000
	Aluminium
Physical data	
Physical data  Housing colour	Aluminium
Physical data  Housing colour  IP rating	Aluminium IP23
Physical data  Housing colour  IP rating  IK rating	Aluminium IP23 IK02
Physical data  Housing colour  IP rating  IK rating  Nominal Product Width (mm)	Aluminium IP23 IK02 130
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm)	Aluminium IP23 IK02 130 50
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D	Aluminium IP23 IK02 130 50
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg)	Aluminium IP23 IK02 130 50 150 0.75
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)	Aluminium IP23 IK02 130 50 150 0.75
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)	Aluminium IP23 IK02 130 50 150 0.75
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type	Aluminium IP23 IK02 130 50 150 0.75 50
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number Packaging single length / height (cm)	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642 17.5
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single width (cm) Packaging single depth (cm)	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642 17.5 15.0
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) DUN14 (outer)	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642 17.5 15.0 17.5
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) DUN14 (outer) Units per outer package	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642 17.5 15.0 17.5 05025768526642
Physical data  Housing colour IP rating IK rating Nominal Product Width (mm) Nominal Product Height (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm)  Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single depth (cm) DUN14 (outer)	Aluminium IP23 IK02 130 50 150 0.75 50  Carton 5025768526642 17.5 15.0 17.5 05025768526642

### **TECHNICAL DRAWINGS**



## Ascent 50 Round - 12 LED Standard Output ASCENT 50 RND SO DALI 3K 2052664



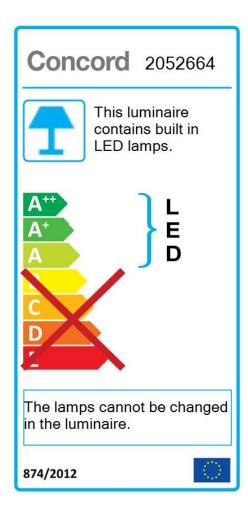



## Ascent 50 Round - 12 LED Standard Output ASCENT 50 RND SO DALI 3K 2052664

