


Optimo Large - LED

Optimo Large LED WW LS3 BL
3089947



Product features

- Integrated LED spotlight for three circuit track (LS3) with unique 2 tone colour combinations made possible by body and trim concept. The twist and lock bezel design allows for quick and easy replacement of reflectors and / or filter. Die-cast aluminium body, 2,698LM, 24W, 112lm/W, 3000K, Driver Current: 600mA, CRI80, 36° beam angle, Non-dimmable LED driver, IP20, IK02, 50,000 hrs (L70), (HxDxW) 128x100x 55mm, 3 step MacAdam ellipse, 1.3kg, Matt Black and Matt black, Class 2, 220-240V, energy class: A++, A+, A

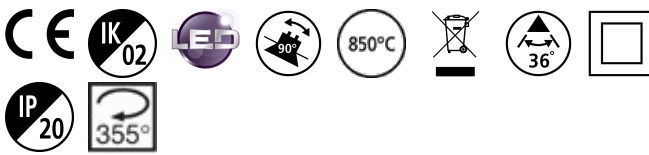

PRODUCT OVERVIEW

IPC Code	3089947
Product name	Optimo Large LED WW LS3 BL
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170033
E-number SE	7416951
Fixture luminous flux (lm)	2698
Luminaire efficacy (lm/W)	112
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	50000
Housing colour	Black/Matte black
IP rating	IP20
IK rating	IK02
Product EAN number	8711971899471
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	3089947
----------	---------

Optimo Large - LED

Optimo Large LED WW LS3 BL
3089947

Product name	Optimo Large LED WW LS3 BL
Technology	LED
Housing	Die cast aluminium
Mount	LS3
Environment	Interior
General application	Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001744
E-number FI	4170033
E-number SE	7416951

Optical data

Fixture luminous flux (lm)	2698
Luminaire efficacy (lm/W)	112
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	36
Distribution type	Direct
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	24
Equivalent watt (W)	36
Electrical protection	Class II
Control gear type	Electronic
Drive current (mA)	600
Inrush Current (A)	8
Inrush Duration (µs)	80
Glow Wire Test (°C)	850
Max. Luminaires per 16A C Breaker	40

Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	355
Housing colour	Black/Matte black
IP rating	IP20
IK rating	IK02
Weight (kg)	1.272

Packaging







Single packaging type	Carton
Product EAN number	8711971899471

Optimo Large - LED

Optimo Large LED WW LS3 BL
3089947


Packaging single length / height (cm)	19.7
Packaging single width (cm)	20.9
Packaging single depth (cm)	17.0
DUN14 (outer)	08711971899471
Units per outer package	1
Packaging outer length / height (cm)	19.7
Packaging outer width (cm)	20.9
Packaging outer depth (cm)	17.0

PHOTOMETRY

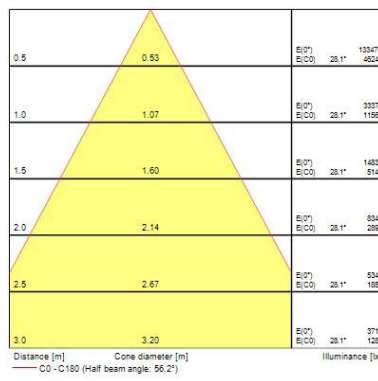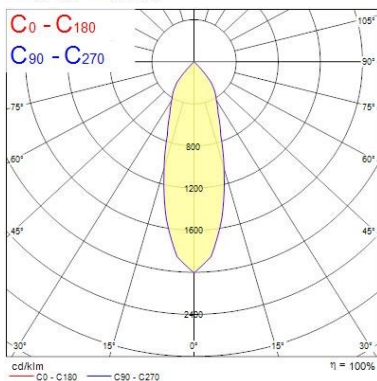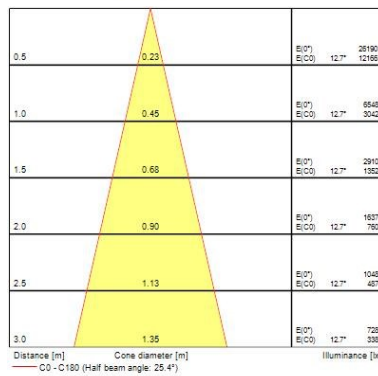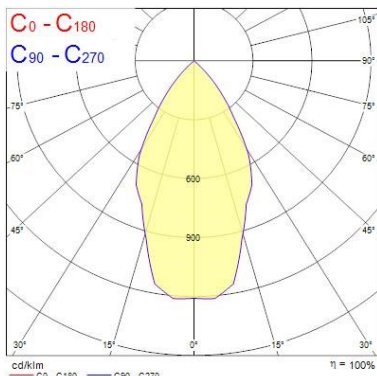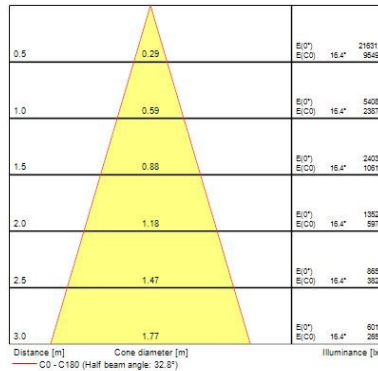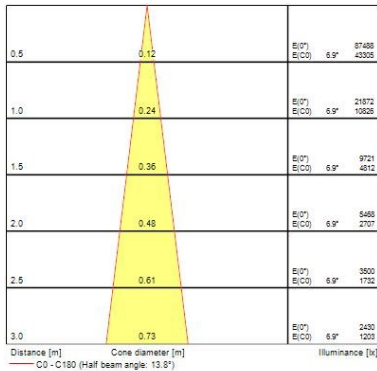


Optimo Large - LED

Optimo Large LED WW LS3 BL
3089947

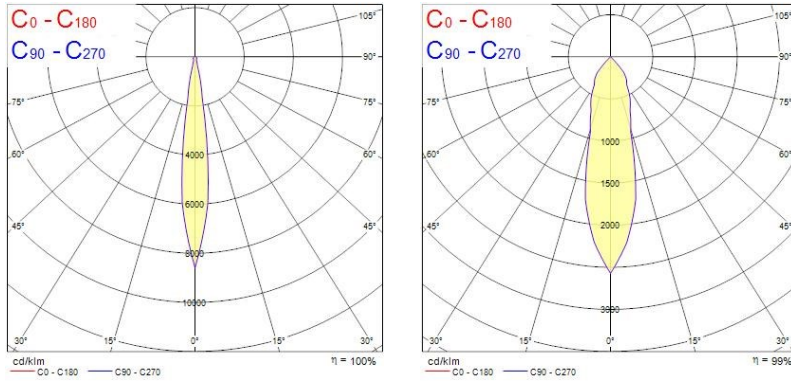

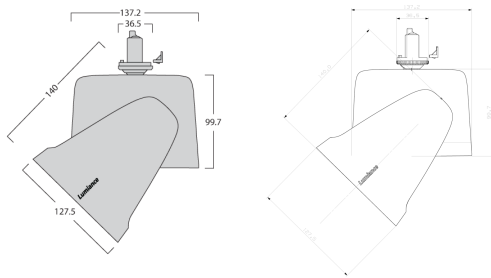

TECHNICAL DRAWINGS




Optimo Large - LED *Optimo Large LED WW LS3 BL* 3089947


Lumiance 3089947


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

Lumiance 3089947  874/2012