

ASPIRE IC6

Aspire® 6.5” 2-Way In-Ceiling Speakers

- > Audiophile performance 2-way in-ceiling speakers
- > 6.5” woven poly-glass composite woofers
- > 1” advanced synthetic polymer dome tweeters
- > 4th order crossovers
- > Steel composition woofer baskets
- > Vented pole pieces
- > “Zero-bezel” frameless steel grilles, paintable
- > Round grilles included, square grilles available separately
- > Three-point spring-loaded toggle clamp mounting system
- > 125 Watts program power handling
- > 53Hz-20kHz frequency response
- > 8 Ohms nominal impedance
- > Sold in pairs

The product of expert Crestron® audio engineering, Aspire® speakers deliver high-end performance for demanding residential installations. Select materials and a refined appearance underscore the meticulous design behind each model. The result is a complete line of in-wall and in-ceiling speakers worthy of a place in every room of the finest custom home.


The Aspire line strikes a perfect balance between performance and price, delivering pristine, impactful sound quality, with minimal impact on your decor thanks to paintable zero-bezel grilles. Round shaped grilles are included, while square grilles are available as an option separately. Streamlined installation of each speaker is facilitated through a three-point, spring-loaded toggle clamp mounting system optimized to minimize interference with obstructions within the ceiling space.

The Aspire IC6 model provides a pair of 2-way in-ceiling speakers featuring 6-1/2 inch woven poly-glass composite woofers for rich, impactful low end, and 1 inch advanced synthetic polymer dome tweeters for crisp, soaring highs. Offset post-mounting of the tweeters reduces midrange frequency response anomalies normally caused by interference between the woofer and the back of the tweeter. Precisely tuned 4th order crossovers ensure a full, warm and detailed response across the spectrum. Power handling is an impressive 125 Watts (program), with a wide frequency response from 53 Hz to 20 kHz (± 3 dB).

SPECIFICATIONS

Features & Performance

Woofer: 6.5 inch (165 mm) woven poly-glass composite w/rubber surround, vented pole piece & steel basket
Tweeter: 0.98 inch (25 mm) advanced synthetic polymer dome, ferrofluid cooling, offset post-mounted
Crossover: 4th order
Crossover Frequency: 2.5 kHz
Impedance: 8 Ohms nominal

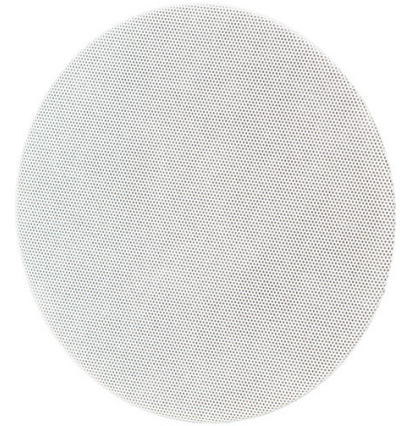

Frequency Response: 53 Hz to 20 kHz (± 3 dB)

Frequency Range: 45 Hz to 20 kHz (-10 dB)

Power Handling: 125 Watts program

Sensitivity: 89.5 dB @ 1W/1m

Connections

Input: (2) spring terminals;
Maximum Wire Size: 10 AWG

Environmental

Temperature: 41° to 104°F (5° to 40°C)
Humidity: 10% to 90% RH (non-condensing)
For indoor use only

Construction

Baffle: ABS plastic, black

Grille: Steel with white textured finish, paintable, magnetically-held “zero-bezel” frameless design (round grilles included, square grilles sold separately)

Mounting: Flush ceiling mount using 3 integral spring-loaded toggle clamps, 1.35 in (34 mm) maximum surface thickness, 4.21 in (107 mm) minimum mounting depth, 8.4 in (214 mm) diameter recommended cutout

Dimensions

Diameter: 9.28 in (236 mm)
Depth: 4.40 in (112 mm)
Dimensions shown are per speaker

Weight

3.44 lb (1.57 kg) per speaker

ASPIRE IC6 Aspire® 6.5" 2-Way In-Ceiling Speakers

MODELS & ACCESSORIES

Available Models

ASPIRE IC6-W-T: Aspire® 6.5" 2-Way In-Ceiling Speakers, White Textured, Pair

Available Accessories

SPKA-NCTP-IC600: New-Construction Speaker Templates

SPKA-GRILLE-IC601: Square Grilles

SPKA-GRILLE-IC602: Round Grilles (for replacement)

ASPIRE IWS82: Aspire® Dual 8" In-Wall Subwoofer

Notes:

Crestron warrants to the original end purchaser that this Crestron Speaker Product, when purchased directly from Crestron or an authorized Crestron Dealer, will be free from defects in material and workmanship for the life of the product except for speaker grilles and outdoor rated speakers, which are warranted for five (5) years. Crestron will at its option and expense either repair the defect or replace the Speaker Product with a new or remanufactured Product or a reasonable equivalent. In cases where a new model is substituted, a modification to the mounting surface may be required. If mounting surface modification is required, Crestron assumes no responsibility or liability for such modifications.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, and Aspire are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2014 Crestron Electronics, Inc.

