

Expospot 90 cardan

EXPOSPOT 90 DUO HE RA90 4000K NB WHITE

0060339



Product features

- Integrated LED double gimbal accent downlight, duo head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 26°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 50W, total fixture output: 2x2789lm, 112lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x292mm, dimensions: 163x307x104mm, weight: 2.1kg.



PRODUCT OVERVIEW

IPC Code	0060339
Product name	EXPOSPOT 90 DUO HE RA90 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4275961
Fixture luminous flux (lm)	2 x 2789
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	26
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288603391
Lamps	No
Included lamp	INTEGRATED LED

Expospot 90 cardan

EXPOSPOT 90 DUO HE RA90 4000K NB WHITE

0060339

DATA TABLE

General data

IPC Code	0060339
Product name	EXPOSPOT 90 DUO HE RA90 4000K NB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4275961

Optical data

Fixture luminous flux (lm)	2 x 2789
Luminaire efficacy (lm/W)	112
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	26
Photobiological Risk Group	RG1

Electrical data


Total power consumption (W)	50
Mains voltage (V)	230-240V~
Lamp power factor	0.92
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	700
Inrush Current (A)	38.8
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	14
Max. Luminaires per 16A C Breaker	17
Max. Luminaires per 20A C Breaker	22
Max. Luminaires per 10A B Breaker	6
Max. Luminaires per 13A B Breaker	8
Max. Luminaires per 16A B Breaker	10
Max. Luminaires per 20A B Breaker	13

Expospot 90 cardan


EXPOSPOT 90 DUO HE RA90 4000K NB WHITE


0060339

TECHNICAL DRAWINGS




SYLVANIA 0060339

 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

Expospot 90 cardan


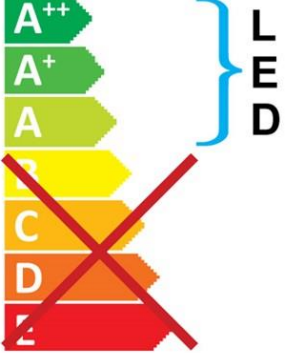
EXPOSPOT 90 DUO HE RA90 4000K NB WHITE

0060339



This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



SYLVANIA 0060339 874/2012