

## Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K DALI WHT CBEZ  
2058945



### Product features

- MYRD IP FL 3K DALI WHT CBEZ



## PRODUCT OVERVIEW

IPC Code	2058945
Product name	MYRD IP FL 3K DALI WHT CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	46
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768589456
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	2058945
Product name	MYRD IP FL 3K DALI WHT CBEZ
Technology	LED
Housing	Aluminium

## Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP FL 3K DALI WHT CBEZ*

### 2058945

<b>Mount</b>	Ceiling recessed
<b>Environment</b>	Integral
<b>General application</b>	Hospitality,Office,Retail,Residential & Consumer
<b>Operating temperature rated (°C)</b>	25
<b>Certifications</b>	EUNEW008
<b>ETIM Class</b>	EC001744

#### Optical data

<b>Fixture luminous flux (lm)</b>	988
<b>Luminaire efficacy (lm/W)</b>	99
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	3000
<b>CRI (Ra)</b>	85
<b>Adjustable chromaticity</b>	N
<b>Beam Angle (°)</b>	46
<b>Distribution type</b>	Direct
<b>Photobiological Risk Group</b>	-

#### Electrical data

<b>Total power consumption (W)</b>	10
<b>Mains voltage (V)</b>	230-240V~
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic
<b>Transformer required</b>	Yes
<b>Minimum dimming level (%)</b>	1
<b>Nominal Frequency (Hz)</b>	50/60Hz

#### Lifetime data

<b>Lumen maintenance - L70 B50</b>	50000
<b>Average life (Nominal) (h)</b>	50000

#### Physical data

<b>Housing colour</b>	White Trim
<b>IP rating</b>	IP65
<b>IK rating</b>	IK02
<b>Diffuser finish</b>	White Trim Chrome Bezel
<b>Reflector finish</b>	Aluminium
<b>Nominal Product Height (mm)</b>	72
<b>Nominal Product Diameter (mm)</b>	90
<b>Weight (kg)</b>	0.44
<b>Recessed Depth (mm)</b>	72

#### Packaging

<b>Single packaging type</b>	Carton
<b>Product EAN number</b>	5025768589456
<b>Packaging single length / height (cm)</b>	17.5
<b>Packaging single width (cm)</b>	15.0
<b>Packaging single depth (cm)</b>	17.5
<b>DUN14 (outer)</b>	05025768589456

## Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K DALI WHT CBEZ 2058945


Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY


0.5	0.34	E(0°) E(C0)	18.9°	799 3269
1.0	0.68	E(0°) E(C0)	18.9°	1923 817
1.5	1.03	E(0°) E(C0)	18.9°	558 353
2.0	1.37	E(0°) E(C0)	18.9°	451 204
2.5	1.71	E(0°) E(C0)	18.9°	338 121
3.0	2.05	E(0°) E(C0)	18.9°	214 91

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 37.8°)

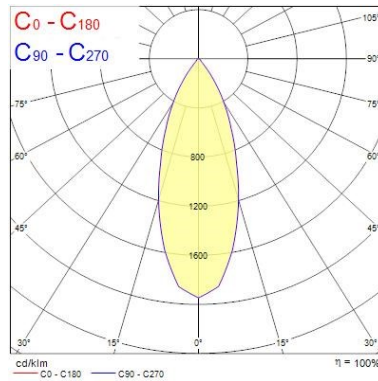


### TECHNICAL DRAWINGS




Dimensions (mm)


## Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K DALI WHT CBEZ 2058945


**Concord** 2058945


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2058945  874/2012