

## Pixer Recessed 1200x300


PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM

2069394



### Product features

- PIXER RECESSED 1200x300 HE 4P 4000K SSH01 EM is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1200x300mm, White colour - RAL9010. SylSmart Connected Building capable, 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 3700 lm, total power consumption 29W, efficacy 128lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. 3hr maintained emergency lighting. Glow wire test 650°C.



### PRODUCT OVERVIEW

IPC Code	2069394
Product name	PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW022
ETIM Class	EC002892
Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	128
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Total power consumption (W)	29
Electrical protection	Class II
Control gear type	SylSmart SSH
Control gear mounting	Remote
Dimmable	Y
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768693948
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

## Pixer Recessed 1200x300

*PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM*

2069394

### General data

IPC Code	2069394
Product name	PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW022
ETIM Class	EC002892

### Optical data

Fixture luminous flux (lm)	3700
Luminaire efficacy (lm/W)	128
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	29
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear required	No
Control gear type	SylSmart SSH
Control gear mounting	Remote
Dimmable	Y
Drive current (mA)	800
Inrush Current (A)	29
Inrush Duration (µs)	146
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	28
Max. Luminaires per 13A C Breaker	37
Max. Luminaires per 16A C Breaker	43
Max. Luminaires per 20A C Breaker	57
Max. Luminaires per 10A B Breaker	16
Max. Luminaires per 13A B Breaker	23
Max. Luminaires per 16A B Breaker	26
Max. Luminaires per 20A B Breaker	28

### Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000
Lumen maintenance - L80 B50	72000

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM  
2069394

Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	66000
Lumen maintenance - L90 B10	61000

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	75
Weight (kg)	6.2
Recessed Depth (mm)	150


### Packaging

Single packaging type	Carton
Product EAN number	5025768693948
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768693948
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

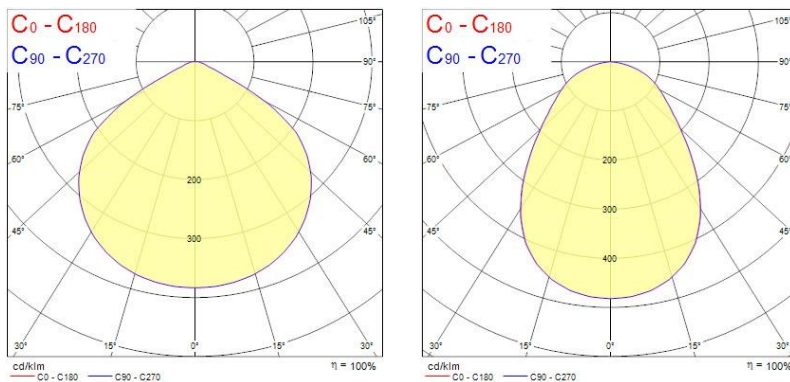

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM  
2069394


Distance [m]	Cone diameter [m]	E [lm]	E (C90)	E (C0)	Illuminance [lx]
0.5	0.89 0.88	7136 1489	41.6° 1498	41.4° 1508	
1.0	1.78 1.76	1784 373	41.6° 373	41.4° 377	
1.5	2.66 2.64	793 166	41.6° 166	41.4° 168	
2.0	3.55 3.53	448 93	41.6° 93	41.4° 94	
2.5	4.44 4.41	288 60	41.6° 60	41.4° 62	
3.0	5.33 5.29	198 41	41.6° 41	41.4° 42	

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 --- C0 - C180 (Half beam angle: 82.8°)  
 --- C90 - C270 (Half beam angle: 93.2°)

Distance [m]	Cone diameter [m]	E [lm]	E (C90)	E (C0)	Illuminance [lx]
0.5	1.51	133	56.4°	56.4°	10
1.0	3.01	31	56.4°	56.4°	3
1.5	4.52	14	56.4°	56.4°	1
2.0	6.02	8	56.4°	56.4°	1
2.5	7.53	6	56.4°	56.4°	0
3.0	9.03	3	56.4°	56.4°	0

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 --- C0 - C180 (Half beam angle: 112.8°)

## TECHNICAL DRAWINGS



**Concord 2069394**

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

874/2012

## Pixer Recessed 1200x300

PIXER RECESSED 1200X300 HE 4P 4000K SSH01 EM

2069394

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**LED**

**Concord** 2069394 874/2012