

## Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU

0044211



### Product features

- OPTIX RECESSED 1200x300 2L 4000K C9 ALU is a high efficacy low glare luminaire for office and education applications with excellent colour rendering. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3500lm. Power consumption 28W. Luminaire efficacy 125lm/W. Lumen maintenance of L90B50 = 44000h, L90B10 = 39000h. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



### PRODUCT OVERVIEW

IPC Code	0044211
Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288442112
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	0044211
Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU

## Optix Recessed 1200x300

*OPTIX RECESSED 1200x300 2L 4000K C9 ALU*  
0044211

Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892

### Optical data

Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0

### Electrical data

Total power consumption (W)	28
Starting time (max) (s)	<0.5
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	8
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	550
Inrush Current (A)	25
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	20
Max. Luminaires per 13A C Breaker	30
Max. Luminaires per 16A C Breaker	40
Max. Luminaires per 20A C Breaker	47
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	15
Max. Luminaires per 16A B Breaker	20
Max. Luminaires per 20A B Breaker	24

### Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	44000
Lumen maintenance - L90 B20	41000
Lumen maintenance - L90 B10	39000

## Optix Recessed 1200x300 OPTIX RECESSED 1200x300 2L 4000K C9 ALU 0044211



### Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Nominal Product Height (mm)	38
Weight (kg)	5.0

### Packaging

Single packaging type	Carton
Product EAN number	5410288442112
Packaging single length / height (cm)	124.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05410288442112
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

## PHOTOMETRY

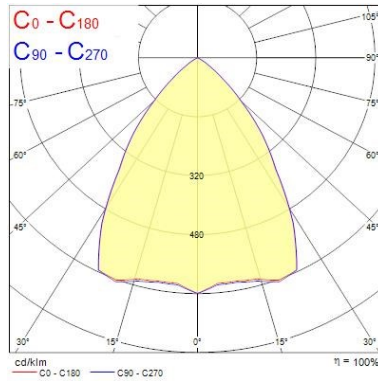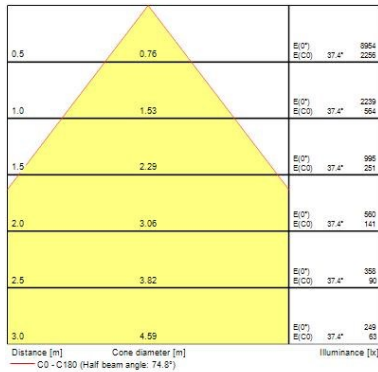

## TECHNICAL DRAWINGS





## Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU


0044211


**SYLVANIA** 0044211


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0044211  874/2012